



4200 Series

Commercial Exit Device

4200 Series Commercial Exit Device

Table of Contents

Finishes	3
Exit Devices	4-6
4200R Series RIM	4
4200V Series Surface Vertical Rod	5
How to Order	6
Door Width Chart	6
Trim	7-13
Lever Designs, ANSI Functions, Finishes, Handing	7
Trim Options	8
Escutcheon	9-10
Sectional	11-12
Plate, Pull, Grip Wide Plate	13-14
Strikes	15
Accessories	15
Architectural Specifications	16

Finishes

Architectural



626 (US26D)
Satin Chromium
Plated, No Coating



630 (US32D)
Satin Stainless Steel,
No Coating

Painted



689 (US28)
Aluminum




695 (N/A)
Dark Duranodic
Bronze



696 (US4))
Satin Brass (Gold)

Finishes shown are representative only. PDQ cannot guarantee that product shipped will match finishes shown.
Not all products are available in all finishes listed.

4200 Series Rim Exit Device

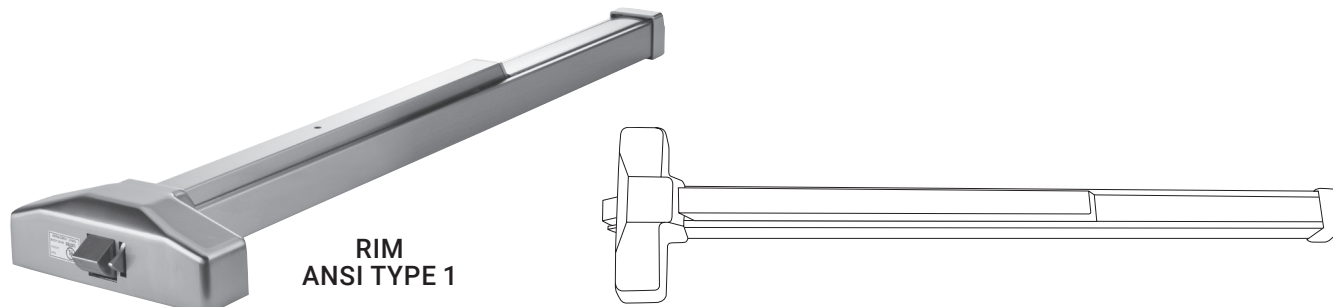

ADA COMPLIANT


Specifications

CHASSIS:	• Corrosion resistant plated steel
RAIL:	• Heavy gauge steel or stainless steel
LATCH:	• RIM (R) – 3/4" throw
BACKSET:	• 2-3/4" Backset Compatible with 161 prep
HAND:	• Device is non-handed
DOGGING:	• Hex key dogging standard • Dogging not available on fire listed devices
MINIMUM STILE WIDTH:	• 4-1/4" for device (exit only) • Minimum stile requirements with trim varies by trim type
DOOR THICKNESS:	• 1-3/4" standard
DOOR WIDTH:	• Standard for 3 ft doors, option available for doors up to 4'
FINISHES:	• 626 – Satin Chrome, 630 – Satin Stainless Steel, 689 – Aluminum, 693 – Black, 695 – Duro Bronze, 696 – Gold
FASTENERS:	• Includes machine screws and wood screws • Sex nuts supplied with all Fire Listed devices
WARRANTY:	• Five (5) year limited warranty
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL 305 listed for "Panic", UL listed for "Fire Exit Hardware" labeled for up to 1-1/2 hours, 3'0" x 7'0" Max Size • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • TAA compliant. Country of origin: Taiwan

Cross Reference

DESCRIPTION	PDQ	CAL ROYAL	CORBIN/ RUSSWIN	DORMA	FALCON	HAGER	PRECISION	SARGENT	S PARKER	TELL	VON DUPRIN	ACCENTRA (FMR. YALE)
RIM	4200R	2200	ED8200	8300	19 R	4700 Rim	5100	2828	UL520	8300	22	2100

4200 Series Surface Vertical Rod Exit Device

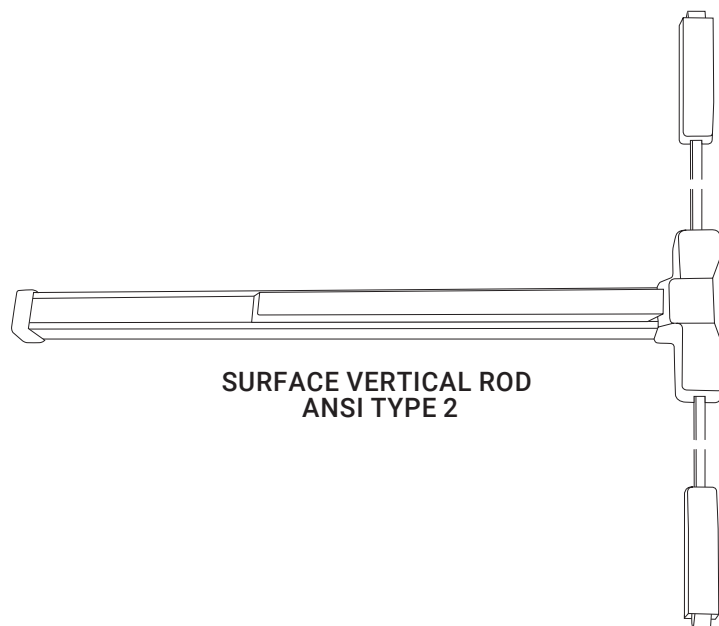

ADA COMPLIANT

Specifications

CHASSIS:	• Corrosion resistant plated steel
RAIL:	• Heavy gauge steel or stainless steel
LATCH:	• SURFACE VERTICAL ROD (V) – Top Latch-Pullman with dead latching 5/8" throw - Bottom Latch- Pullman with 5/8" throw, held retracted during door swing
BACKSET:	• 2-3/4" Backset Compatible with 161 prep
HAND:	• Device is non-handed
DOGGING:	• Hex key dogging standard • Dogging not available on fire listed devices
MINIMUM STILE WIDTH:	• 4-1/4" for device (exit only) • Minimum stile requirements with trim varies by trim type
DOOR THICKNESS:	• 1-3/4" standard
DOOR WIDTH:	• Standard for 3 ft doors, option available for doors up to 4'
FINISHES:	• 626 – Satin Chrome, 630 – Satin Stainless Steel, 689 – Aluminum, 693 – Black, 695 – Duro Bronze, 696 – Gold
FASTENERS:	• Includes machine screws and wood screws • Sex nuts supplied with all Fire Listed devices
VERTICAL RODS:	• Stock for 7' doors standard. Extension rods available for doors up to 10'.
WARRANTY:	• Five (5) year limited warranty
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• UL 305 listed for "Panic", UL listed for "Fire Exit Hardware" labeled for up to 1-1/2 hours, 3'0" x 7'0" Max Size • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • TAA compliant. Country of origin: Taiwan

Cross Reference

DESCRIPTION	PDQ	CAL ROYAL	CORBIN/ RUSSWIN	DORMA	FALCON	HAGER	PRECISION	SARGENT	S PARKER	TELL	VON DUPRIN	ACCENTRA (FMR. YALE)
SURFACE VERTICAL ROD	4200V	2260	ED8400	8400	19 V	4700 SVR	5200	2727	520V	8400	2227	2110

How To Order

QUANTITY	SERIES	DOGGING	APPLICATION	LABELING	SIZE	FINISH
10	42	00	R	F	A	630
		00 – Hex Key Dogging (Standard) Dogging Not Furnished With Fire Listed Devices	R – Rim V – Surface Vertical Rod	F – Fire Listed, Max. 3' Door Width No Designation – Panic	BLANK – 3' doors (Default) A – Doors up to 4' Consult Door Width Chart to determine correct device for your application	626 – Satin Chrome 630 – Satin Stainless Steel 689 – Aluminum 695 – Duro Bronze 696 – Gold

4200 Series Door Width Chart

PART	DESCRIPTION	FOR DOOR	MIN DOOR	MAX CUT	PUSH PAD
4200R	4200 Rim Regular dogging	36"	27"	9"	18"
4200RF	4200 Rim Fire Listed	36"	27"	9"	18"
4200V	4200 SVR Regular dogging	36"	27"	9"	18"
4200VF	4200 SVR Fire Listed	36"	27"	9"	18"
4200RA	4200 Rim Regular dogging	48"	39"	9"	30"
4200VA	4200 SVR Regular dogging	48"	39"	9"	30"

Trim

Lever Designs



MIAMI – MIA
4S TRIM ONLY



BOSTON – BSN
4S TRIM ONLY



PHILADELPHIA – PHL

Trim Types



EW - ESCUTCHEON
WIDE



EN - ESCUTCHEON
NARROW



GW - GRIP PULL
WIDE



S - SECTIONAL
LEVER



P03 - PULL



P02 - PULL



P01 - PLATE



K - SECTIONAL KNOB

ANSI Trim Functions

ANSI FUNCTION	DESCRIPTION
01	Exit only, no trim or blank escutcheon.
02	Entrance by trim when actuating bar is locked down (dummy trim).
03	Entrance by trim when latch is released by key. Key removable only when locked (night latch).
05	Entrance by thumb piece. Key locks or unlocks thumb piece (classroom thumb piece).
08	Entrance by knob or lever. Key locks or unlocks knob or lever (classroom knob/lever).
09	Entrance by knob or lever only when released by key. Key removable when locked.
14	Entrance by trim when latch bolt is released by knob or lever. Always active, no cylinder (passage knob/lever).
15	Entrance by trim when latchbolt is released by thumb piece. Always active, no cylinder (passage thumb piece).

*All functions not available in every trim style


Finishes

CODE	TYPE	DESCRIPTION
613E	Architectural	Dark Oxidized Satin Bronze (Equivalent), No Coating
626 (US26D)	Architectural	Satin Chromium Plated, No Coating
630 (US32D)	Architectural	Satin Stainless Steel, No Coating
689 (US28)	Color	Aluminum
695 (None)	Color	Dark Duranodic Bronze

*All finishes not available in every trim style

Handing

Out Swing Door



LEFT HAND
REVERSE (LHR)

RIGHT HAND
REVERSE (RHR)

OUTSIDE



Trim Options

STYLE		FUNCTION	DESCRIPTION	TRIM TYPE	613E	622	626	689/695
4EW	WIDE ESCUTCHEON 	02	Dummy Trim (Rigid Lever)	4 EW 02 PHL	X	X	X	
		08	Classroom w/ Lever	4 EW 08 PHL	X	X	X	
		09	Storeroom w/ Lever	4 EW 09 PHL				
		14	Passage w/ Lever	4 EW 14 PHL	X	X	X	
4EN	NARROW ESCUTCHEON 	02	Dummy Trim (Rigid Lever)	4 EN 02 PHL		X	X	X
		08	Classroom w/ Lever	4 EN 08 PHL		X	X	X
		09	Storeroom w/ Lever	4 EN 09PHL				
		14	Passage w/ Lever	4 EN 14 PHL		X	X	X

STYLE		FUNCTION	DESCRIPTION	TRIM TYPE	606/613E/ 622	626	689/695
4S	SECTIONAL LEVER HEAVY DUTY	02	Dummy Trim (Rigid Lever)	4 S 02 BSN, MIA, PHL	X	X	
		08	Classroom w/ Lever	4 S 08 BSN, MIA, PHL	X	X	
		09	Storeroom w/Lever	4 S 09 BSN, MIA, PHL			
		Sectional lever trim not compatible when using SNB to through bolt device chassis	14	Passage w/ Lever	4 S 14 BSN, MIA, PHL	X	

STYLE		FUNCTION	DESCRIPTION	TRIM TYPE	630	689/693/695
4K	SECTIONAL KNOB 	08	Classroom	4 K 08	X	
		14	Passage	4 K 14		
4P	PLATE PULL 	01	Exit Only	4 P 01	X	
		02	Dummy Pull Trim	4 P 02		
		03	Night Latch	4 P 03		X
	PLATE TRIM PULL TRIM					
4GW	GRIP PULL* 	02	Dummy Trim (Grip Pull only)	4 GW 02	X	X
		03	Night Latch	4 GW 03		
		05	Classroom w/Thumb Piece	4 GW 05	X	X
		15	Passage w/Thumb Piece	4 GW 15	X	X

4EW Series Heavy Duty Exit Device Trim



Ordering Guide

TYPE		LEVER SHAPES		SPECIAL FINISH COATING		KEYWAY		KEYING	
EW — Escutcheon Wide Stile		PHL — Philadelphia		AM — Anti-microbial		SCC — Default Others - See Keyway Table		KD — Keyed Different (Default) Others - See Keying Table	
4	EW	08	PHL	626	—	D	SCC	KD	
4		02 — Dummy (Rigid Lever) 08 — Classroom 09 — Storeroom 14 — Passage		613E — Dark Oxidized Satin Bronze (Equivalent) 626 — Satin Chrome		D — Default L — Less Cylinder SF6 — SFIC prepped w/ 6 pin core SF7 — SFIC prepped w/ 7 pin core LF6 — Schlage LFIC prepped w/ Schlage core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage LFIC prepped but less core			
SERIES		ANSI FUNCTION		FINISH		CYLINDER OR HOUSING			

Ordering Example: 4 EW 08 PHL 626 D SCC KD

Notes:


- 1 - All levers field handed.
- 2 - Door thickness - 1-3/4".
- 3 - Other finishes available. Contact PDQ Customer Service.

Cylinder Reference Guide

ANSI FUNCTION	DESCRIPTION	6CYLINDER TYPE
08	Classroom	Mortise
09	Storeroom	Mortise



MORTISE CYLINDER



LENGTH INCLUDES CAM

TYPE	LENGTH	PDQ CAM NUMBER
Cylinder, Conventional	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231

Keways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA			PDQ Restricted	TA
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4	PDQ Exclusive	PDQ1		
Russwin D1	RUD		PDQ2		
Russwin 981	RUD981				
Schlage E	SCE	PDQ Exclusive and Restricted			
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Accentra (Yale) E1R	YA8				
Accentra (Yale) GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"0" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

4EN Series Narrow Escutcheon Trim


Ordering Guide

TYPE	LEVER SHAPES	FINISH	CYLINDER OR HOUSING	KEYING
EN — Escutcheon, Narrow Stile	PHL — Philadelphia	626 — Satin Chrome 689 — Aluminum 695 — Dark Duronodic Bronze	D — Default L — Less Cylinder SF6 — SFIC prepped w/ 6 pin core SF7 — SFIC prepped w/ 7 pin core LF6 — Schlage LFIC prepped w/ Schlage core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage LFIC prepped but less core	KD — Keyed Different (Default) Others - See Keying Table
4 EN	08 PHL	689 AM	D SCC	KD
4	02 — Dummy (Rigid Lever) 03 — Night Latch 08 — Classroom 14 — Passage	AM — Anti-microbial	SCC — Default Others - See Keyway Table	
SERIES	ANSI FUNCTION	SPECIAL FINISH COATING	KEYWAY	

Ordering Example: 4 EN 08 PHL 630 D SCC KD

Notes:

- 1 - All levers field handed. 2 - Door thickness - 1-3/4". 3 - Other finishes available. Contact PDQ Customer Service.

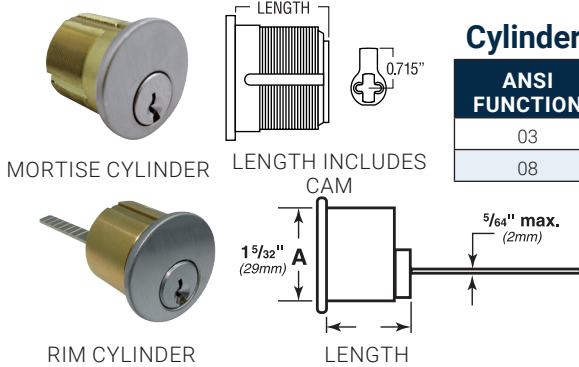

Cylinder Reference Guide

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	RIM
08	Classroom	Mortise

TYPE	LENGTH	PDQ CAM NUMBER
Conventional- RIM	—	—
Conventional - Mortise	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231


Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA			PDQ Restricted	TA
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4	PDQ Exclusive	PDQ1		
Russwin D1	RUD		PDQ2		
Russwin 981	RUD981		PDQ3		
Schlage E	SCE	PDQ Exclusive and Restricted			
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Accentra (Yale) E1R	YA8				
Accentra (Yale) GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"0" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

4S Series Sectional Trim

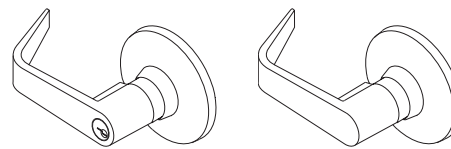

Ordering Guide

TYPE	LEVER SHAPE	FINISH	CYLINDER OR HOUSING	KEYING
S — Sectional	BSN — Boston MIA — Miami PHL — Philadelphia	613E — Dark Oxidized Satin Bronze (Equivalent) 626 — Satin Chrome	D — Default L — Less Cylinder SF6 — SFIC prepped w/ 6 pin core SF7 — SFIC prepped w/ 7 pin core LF6 — Schlage LFIC prepped w/ Schlage core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage LFIC prepped but less core	KD — Keyed Different (Default) Others - See Keying Table
4 S	08 PHL	626 134	D SCC	KD
4	02 — Dummy (Rigid Lever) 08 — Classroom 09 — Storeroom 14 — Passage	AM — Anti-microbial	SCC — Default Others - See Keyway Table	
SERIES	FUNCTION	SPECIAL FINISH COATING	KEYWAY	KEYING

Ordering Example: 4S 08 PHL 626 D SCC KD

Notes:

1 - All levers field handed. 2 - Door thickness - 1-3/4". 3 - Other finishes available. Contact PDQ Customer Service.



KEY IN KNOB/
LEVER CYLINDER

Cylinder Reference Guide

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
08	Classroom	Key in Knob/Lever
09	Storeroom	Key in Knob/Lever


Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA			PDQ Restricted	TA
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4	PDQ Exclusive	PDQ1		
Russwin D1	RUD		PDQ2		
Russwin 981	RUD981	PDQ Exclusive and Restricted	PDQ3		
Schlage E	SCE				
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Accentra (Yale) E1R	YA8				
Accentra (Yale) GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

4K Series Ball Knob Sectional Trim



Ordering Guide

TYPE	FINISH	SPECIAL FINISH COATING	KEYWAY
K – Ball Knob	630 – Satin Stainless Steel	AM – Anti-microbial	SCC – Default Others - See Keyway Table
4 K	08 630	– D	SCC KD
4	08 – Classroom 14 – Passage	D – Default L – Less Cylinder SF6 – SFIC prepped w/ 6 pin core SF7 – SFIC prepped w/ 7 pin core SF6L – SFIC 6 Pin Housing less core SF7L – SFIC 7 Pin Housing less core	KD – Keyed Different (Default) Others - See Keying Table
SERIES	FUNCTION	CYLINDER OR HOUSING	KEYING

Ordering Example: 4 K 08 630 D SCC KD

Notes:

1 - Door thickness - 1-3/4".

2 - Other finishes available. Contact PDQ Customer Service.



KEY IN KNOB/
LEVER CYLINDER

Cylinder Reference Guide

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
08	Classroom	Key in Knob/Lever
09	Storeroom	Key in Knob/Lever

Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R
PDQ Restricted	TA		
Arrow AR1	ARA		
Corbin 59A1	CO59A1		
Corbin 60	CO6		
Corbin L4	CL4	PDQ Exclusive	PDQ1
Russwin D1	RUD		PDQ2
Russwin 981	RUD981		PDQ3
Schlage E	SCE	PDQ Exclusive and Restricted	PDQ3
Schlage C	SCC		
Schlage C-K	SCC-K		
Sargent LA	SAL		
Sargent RA-RC	RA-RC		
Accentra (Yale) E1R	YA8		
Accentra (Yale) GA	GA		
Falcon E-R	FAL		
Kwikset	KW		


Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

4P Series Plate Trim



PLATE TRIM



PULL TRIM



Ordering Guide

TYPE	ANSI FUNCTION	SPECIAL FINISH COATING	KEYWAY
P – Plate	01 – Exit Only 02 – Dummy Pull 03 – Night Latch	AM – Anti-microbial	SCC – Default Others - See Keyway Table
4 P	03 689	– D	SCC KD
4	689 – Aluminum 695 – Dark Duronodic Bronze	D – Default L – Less Cylinder SF6 – SFIC prepped w/ 6 pin core SF7 – SFIC prepped w/ 7 pin core LF6 – Schlage LFIC prepped w/ Schlage core SF6L – SFIC 6 Pin Housing less core SF7L – SFIC 7 Pin Housing less core LFL – Schlage LFIC prepped but less core	KD – Keyed Different (Default) Others - See Keying Table
SERIES	FINISH	CYLINDER OR HOUSING	KEYING

Ordering Example: 4 P 03 689 D SCC KD


Notes:

1 - Door thickness - 1-3/4".

2 - Other finishes available. Contact PDQ Customer Service.



RIM CYLINDER

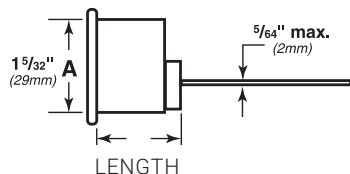

Cylinder Reference Guide

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	RIM

Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA			PDQ Restricted	TA
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4	PDQ Exclusive	PDQ1		
Russwin D1	RUD		PDQ2		
Russwin 981	RUD981		PDQ3		
Schlage E	SCE	PDQ Exclusive and Restricted			
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Accentra (Yale) E1R	YA8				
Accentra (Yale) GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

4GW Series Grip Wide Plate Trim




Ordering Guide

TYPE	ANSI FUNCTION	FINISH	CYLINDER OR HOUSING	KEYING
GW — Grip Pull, Wide Stile	02 — Dummy Trim 03 — Night Latch 05 — Classroom w/Thumb Piece 15 — Passage w/Thumb Piece	626 — Satin Chrome 630 — Satin Stainless Steel 689 — Aluminum 695 — Dark Durodonic Bronze	D — Default L — Less Cylinder SF6 — SFIC prepped w/ 6 pin core SF7 — SFIC prepped w/ 7 pin core LF6 — Schlage LFIC prepped w/ Schlage core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schlage LFIC prepped but less core	KD — Keyed Different (Default) Others - See Keying Table
4 GW	03 RHR	630 —	D SCC	KD
4	RHR LHR	AM — Anti-microbial	SCC — Default Others - See Keyway Table	
SERIES	HANDING	SPECIAL FINISH COATING	KEYWAY	

Ordering Example: 4 GW 03 RHR 630 D SCC KD

Notes:

- 1 - Door thickness - 1-3/4".
- 2 - Other finishes available. Contact PDQ Customer Service.
- 3 - Trim functions 02, 03, 04 do not align with functions 05 and 15 when used on a pair of doors.

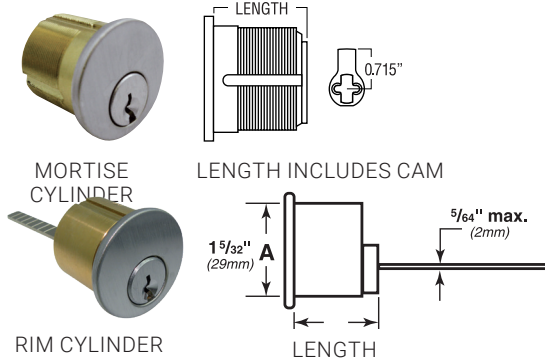

Cylinder Reference Guide

ANSI FUNCTION	DESCRIPTION	CYLINDER TYPE
03	Night Latch	RIM
05	Classroom w/Thumbpiece	Mortise

TYPE	LENGTH	PDQ CAM NUMBER
Conventional - RIM	—	—
Conventional - Mortise	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231


Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA			PDQ Restricted	TA
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4	PDQ Exclusive	PDQ1		
Russwin D1	RUD				
Russwin 981	RUD981				
Schlage E	SCE	PDQ Exclusive and Restricted	PDQ3		
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Accentra (Yale) E1R	YA8				
Accentra (Yale) GA	GA				
Falcon E-R	FAL				
Kwikset	KW				


Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"0" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK


Strikes

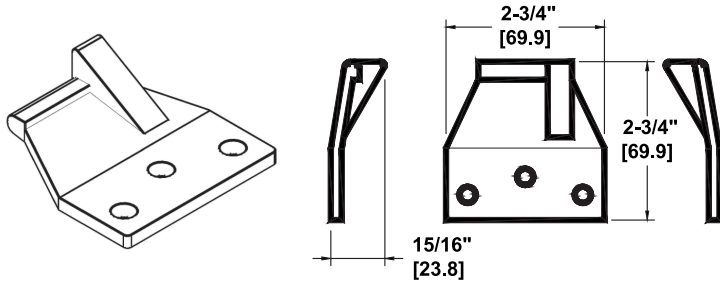


429019 DOUBLE DOOR STRIKE

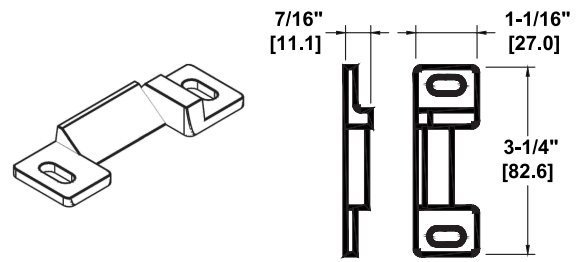

429036 RIM STD. LOW PROFILE STRIKE
(2-3/4" BACKSET) FIRE & PANIC

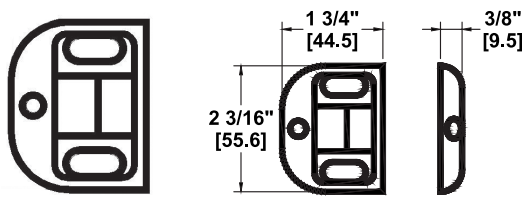

429006 SVR BOTTOM
STRIKE W/2 SHIMS PANIC
AND FIRE

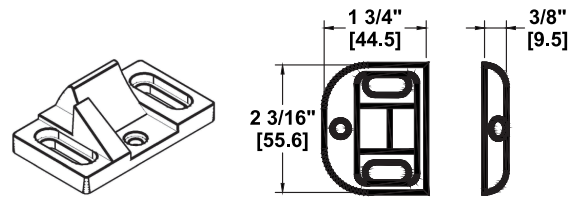

429005 SVR TOP STRIKE W/2 SHIMS PANIC AND
FIRE

Accessories


PART (SPECIFY FINISH & FUNCTION)	DESCRIPTION	PLATED (626/630)	PAINTED (689/693/695/696)
429020	Top surface vertical rod for 7'0" door	X	X
429021	1' extension, vertical rod (specify finish)*	X	X
429023	3' extension, vertical rod (specify finish)*	X	X
429024	Bottom surface vertical rod (specify finish)*	X	X
429001	Sex nut and bolt set	X	X
429002	Plate, Latch Filler-covers Type 160 or 161 prep	X	N/A
429003	Plate, Strike filler	X	
429005	Strike, SVR Top, Fire and Panic w/2 ea. 1/16" shims	X	
429006	Strike, SVR Bottom, Fire and Panic w/2 ea. 1/16" shims	X	
429014	Trim back plate (2-1/2" x 8"), use w/narrow escutcheon to cover 161 prep	X	
429017	Trim back plate (3-1/2" x 8"), use w/narrow escutcheon to cover 161 prep	X	
429018	Adapter plate	X	
429019	Double door strike	X	
429036	Strike, Rim, Fire and Panic	X	
429043	Dogging Key	X	
429150	Universal Glass Bead Kit - Includes 2 ea. 1/8" spacers for chassis, end cap and rod guides	X	

*NOT FOR FIRE RATED DEVICES

Suggested Architectural Specifications

All exit devices shall be PDQ 4200 Series rim or surface vertical rod devices. Surface vertical rod devices to have top and bottom pullman latch bolts. Latch bolts to be dead locking where applicable. All touch bar components to be constructed of heavy gauge wrought steel or stainless steel. Devices to be furnished with metal chassis covers and end caps. Devices to be available for panic and fire labeled doors. Devices for non-labeled doors shall have hex key dogging standard. All devices to offer a variety of trim options including escutcheon, sectional lever, sectional knob, plate and grip pull. Fasteners to be furnished for wood and metal applications. Fire listed devices furnished standard with sex nuts. Devices shall be listed by U.L./U.L.C. and comply with U.L. 10C and UBC 7-2 (1997) for positive pressure. All products to carry a 5-year limited warranty. All devices and trim shall comply with ADA Guidelines and Buy American Act.

Architectural Finishes. No Plastic Parts.

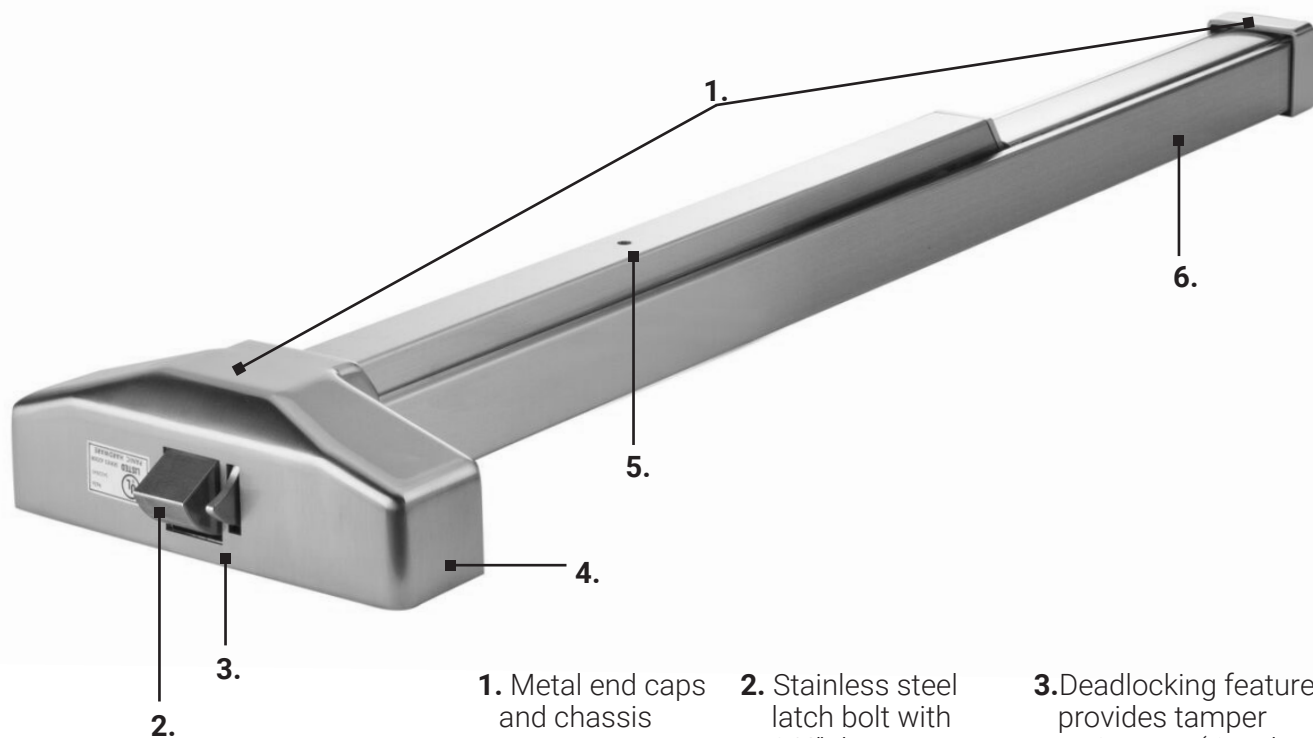

- 1. Metal end caps and chassis cover
- 2. Stainless steel latch bolt with 3/4" throw (rim shown), 5/8" throw (vertical rod devices)
- 3. Deadlocking feature provides tamper resistance (rim shown)
- 4. Corrosion resistant steel plated chassis
- 5. Hex key dogging (Dogging not available with fire labeled devices)
- 6. Heavy gauge roll formed steel or stainless steel rail

Decorative Finish Collection

Architectural

626 Satin Chromium Plated
630 Satin Stainless Steel

Painted

689 Aluminum
693 Black
695 Dark Bronze
696 Gold





SECURING CONFIDENCE OPENING POSSIBILITIES

Phone: 717.656.4281

Tech Support: 800.441.9692

Email: help@pdqlocks.com

Headquarters: 2230 Embassy Drive, Lancaster, PA
17603 P.O Box 6426, Lancaster, PA 17607

Regional Distribution Centers: Lancaster, PA | Norcross,
GA | Auburn, WA

Middle East Manufacturing: Dammam, Kingdom of
Saudi Arabia