



Electric Strikes | For Cylindrical Locks



Specifications


85001 ELECTRIC STRIKE:	• Designed for use with all PDQ Grade 1 and Grade 2 Cylindrical Locks
85003 ELECTRIC STRIKE:	• Designed for use with all PDQ MR Series Mortise Locks WITHOUT Deadbolt
FEATURES:	• Input voltage:12-24 VDC • Field changeable from FAIL SECURE to FAIL SAFE • Factory tested to 1,000,000 cycle
CURRENT:	• 0.28A @ 12 VDC • 0.14A @ 24 VDC

Electric Strikes

PART NO.	DESCRIPTION
85001	For Cylindrical Locks
85003	For Mortise locks (no Deadbolt)

NOTE: Check with Factory for other finishes.

9910 Electric Strike | For 63/6400 Rim Exit Devices

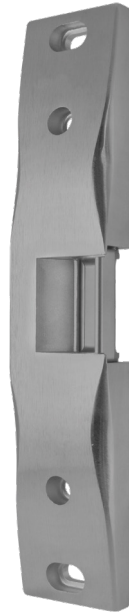


9910

Specifications

9910 ELECTRIC STRIKE:	• Designed for use with all PDQ 6300 / 6400 Rim Exit Devices
FEATURES:	<ul style="list-style-type: none">• Completely surface-mounted• Accommodates 1/2" to 3/4" (13mm–19mm) latch projection• Mounting spacer included to provide enhanced latch engagement• Stainless steel ensures superior strength and creates a sleek aesthetic design• Horizontal adjustment ensures proper latch positioning to compensate for door misalignment – up to 1/4" (6.4mm)• Conventional keeper design• Plug-in wire connectors• Lockdown holes for secure mount• HEX socket head cap screws for added support• Installation tool included• Non-handed
CERTIFICATIONS, LISTINGS, COMPLIANCES:	<ul style="list-style-type: none">• 1,500lbf Static• 70 ft-lb Dynamic• 250,000 Cycles• Fail-Secure• 3-Hour Fire Rated
CURRENT:	• 500mA Field-Selectable 12/24VDC & 12-24VAC (Max at 12VDC)
WARRANTY:	• 5 Year Limited Warranty
FINISH:	• 630 (US32D) Satin Stainless Steel

EPT100 - Electric Power Transfer

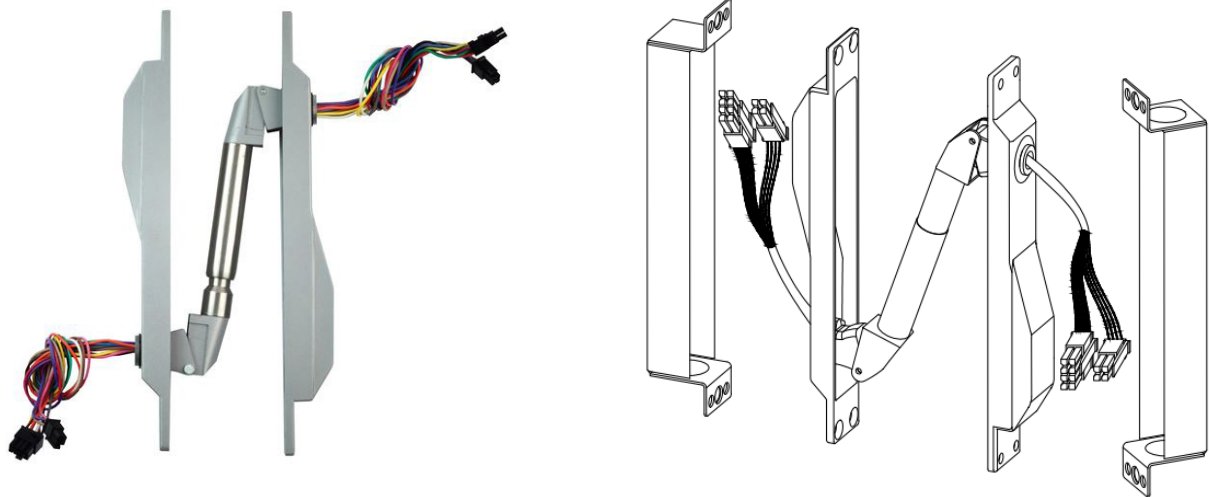

Specifications



MODEL NUMBERS:	<ul style="list-style-type: none">• EPT100 - ISMC US28• EPT100 - ISMC S4
FEATURES:	<ul style="list-style-type: none">• (12) 24 AWG wires with Industry Standard Molex Connectors (ISMC)• Max Rating: 24 VDC, 1A• Mortises into door and frame and is completely concealed when door is closed• UL / ULC Listed for fire doors
FINISHES:	<ul style="list-style-type: none">• US28 (628) - Satin Aluminum• S4 (693) - Black Painted

Wire Harness



Specifications

FEATURES:	<ul style="list-style-type: none">• Molex Connector on one end with other end pinned (Allegion Configuration)• Quick and easy installation• Wires are coordinated to work with other PDQ electro-mechanical hardware products• Easy disconnect to allow fast and safe maintenance on products
-----------	--

MODEL NUMBERS:	FEATURES:
ISMC - 6	6" Wire Harness
ISMC - 38	38" Wire Harness
ISMC - 44	44" Wire Harness
ISMC - 50	50" Wire Harness
ISMC - 192	192" Wire Harness



SECURING CONFIDENCE **OPENING POSSIBILITIES**

Phone: 717.656.4281

Tech Support: 800.441.9692

Email: help@pdqlocks.com

Headquarters: 2230 Embassy Drive, Lancaster, PA
17603 P.O Box 6426, Lancaster, PA 17607

Regional Distribution Centers: Lancaster, PA | Norcross,
GA | Auburn, WA

Middle East Manufacturing: Dammam, Kingdom of
Saudi Arabia