




Slim Cover Commercial Closer Grade 1

# 5300 Series

# 5300 SERIES

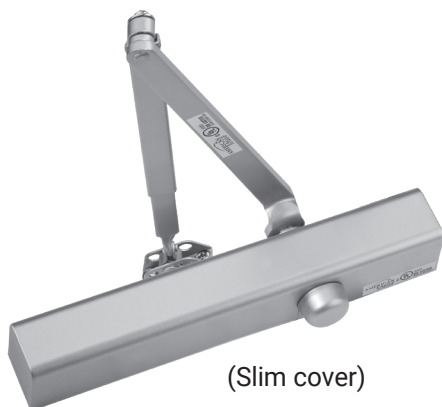

(Slim cover)

## Pivot Stop Arm



The Pivot Stop Arm (PS) is designed to serve as a medium-duty door stop for situations where a door stop or overhead stop is not practical. PS uses backcheck to slow the door and a stop that is integrated into the closer arm to limit the travel of the door (integral stop). PS is available in Regular and Top Jamb mounting. Templating is available for opening angles from 85 - 100 degrees in 5-degree increments.

## Spring Cushion Stops



630 SATIN STAINLESS STEEL



613E DARK OXIDIZED SATIN BRONZE (EQUIVALENT)



605 BRIGHT BRASS

PDQ's SCS Series Spring Cushion Stop helps reduce wear and tear on the opening. As the door begins moving through backcheck to its maximum opening angle, the stop acts as a shock absorber, dampening the impact forces.

## Specifications



|                                               |                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>BODY:</b>                                  | • Cast High Strength Aluminum Alloy Body                                                                                                                                                                                                                                                                                                               |
| <b>ARM OPTIONS:</b>                           | <ul style="list-style-type: none"> <li>• PA – Parallel Arm</li> <li>• HO – Hold Open</li> <li>• DS/DSHO – Heavy Duty Parallel Arm Stop</li> <li>• SCS/SCSHO – Heavy Duty Parallel Arm Cushion Stop</li> <li>• TA/TAHO – Track Arm</li> <li>• EDA/EDAHO – Extra Duty Parallel Arm</li> <li>• PS – Pivot Stop Arm</li> </ul>                             |
| <b>ADJUSTMENT:</b>                            | <ul style="list-style-type: none"> <li>• Hydraulic controlled closing</li> <li>• Separate hydraulic backcheck standard</li> <li>• Optional adjustable delayed action (in addition to backcheck)</li> </ul>                                                                                                                                             |
| <b>RETROFIT:</b>                              | • Common 12" x 3/4" mounting hole pattern retrofits Norton 8300/8500® and Accentra (Yale) 3300/3500                                                                                                                                                                                                                                                    |
| <b>SIZE:</b>                                  | • Adjustable BF through 6                                                                                                                                                                                                                                                                                                                              |
| <b>MOUNTING:</b>                              | <ul style="list-style-type: none"> <li>• Includes sex nuts/bolts and screws for wood/metal doors/frames</li> <li>• Tri-packed for regular, top jamb and parallel arm installations</li> <li>• Separate limiting stop may be required for high abuse applications</li> <li>• Self drilling, self tapping screws standard</li> </ul>                     |
| <b>COVER:</b>                                 | • 5300 Series - Streamline plastic cover (non-handed) 5500 Series - Full plastic cover standard (field reversible)                                                                                                                                                                                                                                     |
| <b>FINISHES:</b>                              | • 605 – Bright Brass, 625 – Bright Chrome, 689 – Aluminum, 693 – Black, 695 – Duro Bronze, 696 – Gold                                                                                                                                                                                                                                                  |
| <b>WARRANTY:</b>                              | • Twenty-five (25) year Limited Warranty                                                                                                                                                                                                                                                                                                               |
| <b>CERTIFICATIONS, LISTINGS, COMPLIANCES:</b> | <ul style="list-style-type: none"> <li>• UL listed for labeled swinging fire doors rated up to and including 3 hours</li> <li>• Certified to ANSI/BHMA A156.4 Grade 1</li> <li>• Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings</li> <li>• TAA compliant. Country of origin: KR</li> </ul> |

## Finishes Architectural



605 (US3)  
Bright Brass



625 (US26)  
Bright Chromium

## Painted



689 (US28)  
Aluminum



693  
Black



695  
Dark Duranodic  
Bronze



696  
Gold

Finishes shown are representative only. PDQ cannot guarantee that product shipped will match finishes shown. Not all products are available in all finishes listed.

## Typical Applications

- Assisted Living
- Exterior Doors in Heavy Draft/Wind Conditions
- Government Facilities
- Healthcare

- Higher Education
- Hospitality
- Houses of Worship
- Industrial
- K-12 Education
- Offices
- Retail

## How to Order

## Features

- **1-1/4" diameter hardened steel piston**
- Heavy duty, fully featured architectural style door control
- Available with modern streamline cover or full sized cover
- Compact appearance and features meet the demands of institutional and commercial applications
- Maximum 4" reveal for Top Jamb.

- The standard tri-pack, full range spring adjustment and common 12" x 3/4" mounting hole pattern make the 5300/5500 ideally suited for stocking distributors and retrofit applications
- Adjustable hydraulic backcheck prevents damage for uncontrolled door opening
- Perfect solution for a variety of applications requiring streamline architectural grade door controls

| QUANTITY | SERIES          | DELAYED ACTION                                                            | BACKCHECK                           | ARM TYPE                                                                                                                                                                                                                                                                                                                                                            | FINISH                                                                                                        | ACCESSORIES                                                                                                                             |
|----------|-----------------|---------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| 10       | 53              | 01                                                                        | BC                                  | PA                                                                                                                                                                                                                                                                                                                                                                  | 689                                                                                                           | —                                                                                                                                       |
|          | 53 – Slim Cover | 01 – Non-Delayed Action<br>41 – Delayed Action (In Addition to Backcheck) | BC – Adjustable Hydraulic Backcheck | DS – Door Saver Arm<br>DSHO – Door Saver Hold Open Arm<br>EDA – Extra Duty Arm<br>EDAHO – Extra Duty Arm Hold Open<br>HO – Hold Open, Tri-Pack<br>PA – Tri-Pack (standard)<br>SCS – Spring Cushion Stop<br>SCSHO – Spring Cushion Stop Hold open<br>TA – Track Arm<br>TAHO – Track Arm Hold Open<br>DA – Delayed Action<br>PS – Pivot Stop Arm<br>BLANK – Body Only | 605 – Bright Brass<br>625 – Bright Chrome<br>689 – Aluminum<br>693 – Black<br>695 – Duro Bronze<br>696 – Gold | BP – Back Plate<br>BS – Blade Stop Spacer<br>DPPA – Parallel Arm Drop Plate<br>DPTJ – Top Jamb Drop Plate<br>NFB – Narrow Frame Bracket |

## Size Selector

| APPLICATION        | CLOSER SIZE                                                                            | INTERIOR         | EXTERIOR |
|--------------------|----------------------------------------------------------------------------------------|------------------|----------|
| Regular / Top Jamb |  BF | 5 lbf (36" door) | NA       |
|                    | 1                                                                                      | 32"              | 28"      |
|                    | 2                                                                                      | 36"              | 32"      |
|                    | 3                                                                                      | 42"              | 36"      |
|                    | 4                                                                                      | 48"              | 42"      |
|                    | 5                                                                                      | 54"              | 48"      |
| Parallel Arm       |  BF | 5 lbf (36" door) | NA       |
|                    | 1                                                                                      | 28"              | NA       |
|                    | 2                                                                                      | 32"              | 28"      |
|                    | 3                                                                                      | 36"              | 32"      |
|                    | 4                                                                                      | 42"              | 36"      |
|                    | 5                                                                                      | 48"              | 42"      |

Note: 5500 Series Closers can be adjusted to meet ADA barrier free applications. Strict compliance with ADA barrier free requirements may result with door not fully closing and latching. Check with local AHJ. Closer sizes may vary due to site conditions.

## Cross Reference


| MANUFACTURER                    | PDQ  | CAL ROYAL | CORBIN/RUSSWIN | DORMA | FALCON | HAGER | DORMA COMMERCIAL | LCN       | NORTON | SARGENT | ACCENTRA |
|---------------------------------|------|-----------|----------------|-------|--------|-------|------------------|-----------|--------|---------|----------|
| SERIES                          | 5300 | CR801S    | DC3200         | 8616  | SC80   | 5200  | QDC200S          | 1460/1461 | 8300   | 1430    | 3300     |
| MOUNTING HOLE PATTERN RETRO-FIT | YES  | YES       | NO             | YES   | —      | NO    | YES              | NO        | YES    | NO      | YES      |

Information on this sheet is compiled from public documents and third parties. As a result, PDQ makes no guarantees as to their accuracy, content, quality or availability. Comparisons were made using the technical features only and are not commercial comparisons. Final suitability should be determined by a professional hardware consultant.

## Mounting Position


### Regular Arm (RA)

Regular arm mount is a pull side application with double lever arm. The closer mounts on the door and the arm mounts to the frame. It provides the most efficient operation for door control and is commonly used on in-swing doors from corridors or other interior doors. Regular arm mount is a poor choice for exterior out-swinging doors as it would put the closer on the exterior of the building. The arm assembly projects directly out from the frame. That may be a concern for vandalism or aesthetics. Regular arm application can be used with non-hold open or hold open arms.

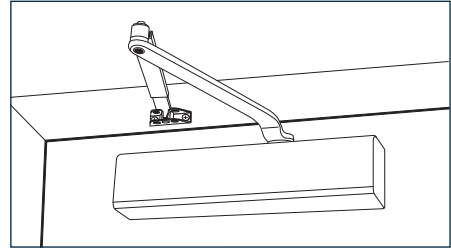


### Top Jamb Mount

Top jamb mount is a push side double lever arm application that offers the best alternative to regular arm mount. The closer mounts to the frame and the arm mounts to the door. This application is commonly used on exterior out-swinging doors. It is a poor application for in-swinging doors from a corridor as it places the closer arm in a visible application projecting into the corridor. The arm projects out similar to regular arm mount. Therefore, it can be a concern for vandalism or aesthetics. Top jamb application can be used with non-hold open or hold open arms.

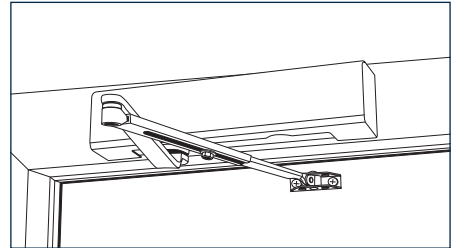

### Parallel Arm (PA)

Parallel arm mount is a push side double lever arm application. The closer is installed on the push side of the door and the arm is mounted to a parallel arm adapter plate installed to the frame soffit. The arm is approximately parallel with the face of the door, eliminating the projection condition evident with regular arm and top jamb applications. Parallel arm is often preferred where aesthetics or vandalism are concerns. Parallel arm is less efficient than regular or top jamb mounts due to the geometry of the arm. Parallel arm application can be used with non-hold open or hold open arms.

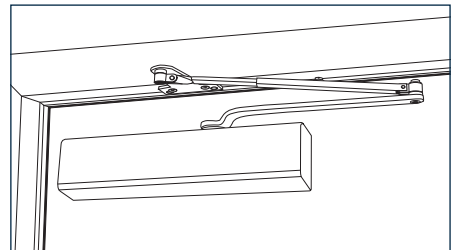



### Parallel Stop Arm (DS/DSHO) Extra Duty PA Arm (EDA/EDAHO)

The parallel stop arm mount is an enhanced version of the parallel arm application. It is similar to the parallel arm mount but incorporates a heavy duty rigid arm and soffit plate with limiting dead stop. The dead stop feature is field handed. The closer's backcheck function should be adjusted to cushion the impact of the stop. The parallel stop arm is intended for use where an auxiliary stop cannot be utilized. The parallel stop arm is available in non-hold open (DS) and hold open (DSHO) applications.




**Recommend using the SCS Spring Cushion Stop for moderate to high abuse installations.**

For Extra Duty PA Arm applications, specify EDA or EDAHO. Similar to DS/DSHO without the stop. Requires separate limiting stop by others.

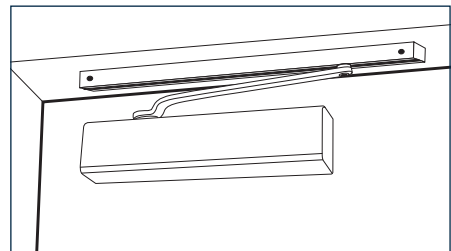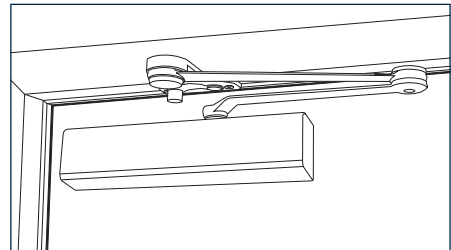

### Track Arm (TA)


The non-handed Track Arm mount incorporates a single stamped arm not designed to be used as a limiting dead stop. It's low profile helps to eliminate projecting arm conditions, which can reduce vandal damage.

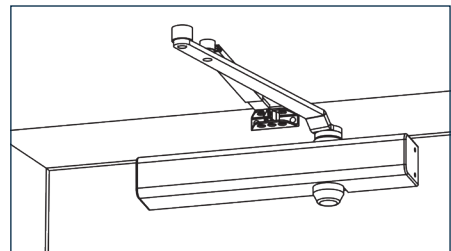


### Pivot Stop Arm (PS)

The PS (Pivot Stop) arm is designed to serve as a medium-duty door stop for situations where a door stop or overhead stop is not practical. Available in Regular and Top Jamb mounting, the PS arm uses backcheck to slow the door and a stop integrated into the closer arm to limit the travel of the door. The PS arm limits the travel of the door to a specific, templated angle. Templating is available for opening angles from 85 to 110 degrees in 5 degree increments. The PS arm is not available with hold-open.


## Arms




**RA** - REGULAR ARM




**DS** - DOOR SAVER (LIMITING STOP) ARM




**DSHO** - DOOR SAVER (LIMITING STOP) HOLD OPEN ARM




**HO** - HOLD OPEN ARM




**EDA** - EXTRA DUTY ARM




**EDAHO** - EXTRA DUTY ARM HOLD OPEN




**TA** - TRACK ARM ASSEMBLY




**TAHO** - TRACK ARM HOLD OPEN




**PS** - PIVOT STOP ARM



**PA** - PARALLEL ARM BRACKET




**PAHO** - PARALLEL ARM HO BRACKET




**DBPA** - PARALLEL ARM DROP BRACKET PA APPLICATION ONLY


## Accessories




**BP** - BACK PLATE




**BS** - BLADE STOP SPACER




**DPPA** - PARALLEL ARM DROP PLATE



**DPTJ** - TOP JAMB DROP PLATE




**NFB** - NARROW FRAME BRACKET




**SDST** - SELF DRILLING SELF TAPPING SCREWS


## Mounting Plates




**BP** - BACK PLATE




**DPTJ** - TOP JAMB DROP PLATE



**DPPA** - PARALLEL ARM DROP PLATE




**BS** - BLADE STOP SPACER



**NFB** - NARROW FRAME BRACKET

## Covers



**SV** - STREAMLINE PLASTIC COVER

## Suggested Architectural Specifications

All door closers shall be narrow projection PDQ 5500 Series with full rack and pinion construction, heavy duty cast aluminum closer body, stamped flat style arm assembly and full cover. Hydraulic control shall be through separate hex-key noncritical sweep, latch and backcheck adjustment. Optional delayed action to be effective from maximum opening to approximately 70 degrees. Closers shall be non-handed, suitable for regular, top jamb and parallel arm applications with fasteners for wood or metal doors and frames. Sex nuts and bolts shall be furnished standard. Spring adjustment to be provided throughout a range of sizes 1-6 and capable of meeting barrier free opening force requirements. All products carry a 25-year manufacturer's limited warranty. Closers shall be listed by U.L./U.L.C., comply with UL 10C and UBC 7-2 (1997) for positive pressure and certified to ANSI A156.4 Grade 1.



# SECURING CONFIDENCE OPENING POSSIBILITIES

**Phone:** 717.656.4281

**Tech Support:** 800.441.9692

**Email:** [help@pdqlocks.com](mailto:help@pdqlocks.com)

**Headquarters:** 2230 Embassy Drive, Lancaster, PA  
17603 P.O. Box 6426, Lancaster, PA 17607

**Regional Distribution Centers:** Lancaster, PA | Norcross,  
GA | Auburn, WA

**Middle East Manufacturing:** Dammam, Kingdom of  
Saudi Arabia