


EPT100 - Electric Power Transfer



Specifications

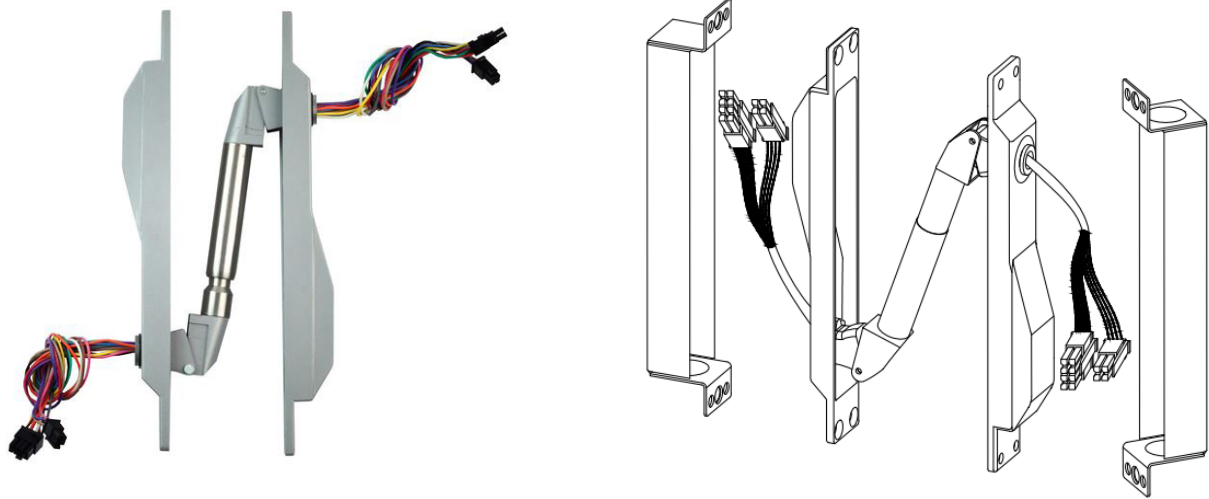

MODEL NUMBERS:	<ul style="list-style-type: none">• EPT100 - ISMC US28• EPT100 - ISMC S4
FEATURES:	<ul style="list-style-type: none">• (12) 24 AWG wires with Industry Standard Molex Connectors (ISMC)• Max Rating: 24 VDC, 1A• Mortises into door and frame and is completely concealed when door is closed• UL / ULC Listed for fire doors
FINISHES:	<ul style="list-style-type: none">• US28 (628) - Satin Aluminum• S4 (693) - Black Painted



SECURING CONFIDENCE **OPENING POSSIBILITIES**

Phone: 717.656.4281

Tech Support: 800.441.9692

Email: help@pdqlocks.com

Headquarters: 2230 Embassy Drive, Lancaster, PA
17603 P.O Box 6426, Lancaster, PA 17607

Regional Distribution Centers: Lancaster, PA | Norcross,
GA | Auburn, WA

Middle East Manufacturing: Dammam, Kingdom of
Saudi Arabia