

6400R - PANIC RIM EXIT DEVICE WITH DOUBLE DOOR STRIKE

6400 SERIES EXIT DEVICES USING SNB OR SURFACE MOUNT FASTENERS

TEMPLATE: 639324
REV. 0 2/16/26

DEVICE

MACHINE SCREWS:

USE #7 OR 13/64" DRILL AND 1/4-20 TAP

WOOD SCREWS:

USE 5/32" DRILL

SEX NUTS:

USE 3/8" DRILL PULL SIDE
USE 9/32" DRILL PUSH SIDE


STRIKE

MACHINE SCREWS:

USE #25 OR 5/32" DRILL AND #10-24 TAP

NOTES:

1. VERIFY PRINTED TO SCALE
2. SEX NUTS MAY BE REQUIRED FOR UNREINFORCED DOORS OR COMPOSITE FIRE DOORS. CONSULT DOOR MANUFACTURER'S RECOMMENDATIONS
3. SEE TRIM TEMPLATE (IF APPLICABLE) FOR RELATED MACHINING DETAILS
4. DIMENSION "X" SIZED FOR DOOR. REFER TO DEVICE INSTRUCTIONS WHEN CUTTING DOWN FOR NARROWER OPENING
5. CHECK PDQ WEBSITE FOR MOST RECENT REVISION WWW.PDQLOCKS.COM
6. MINIMUM STYLE WIDTH:
DEVICE: 3 1/4"
STRIKE: 1 3/4"

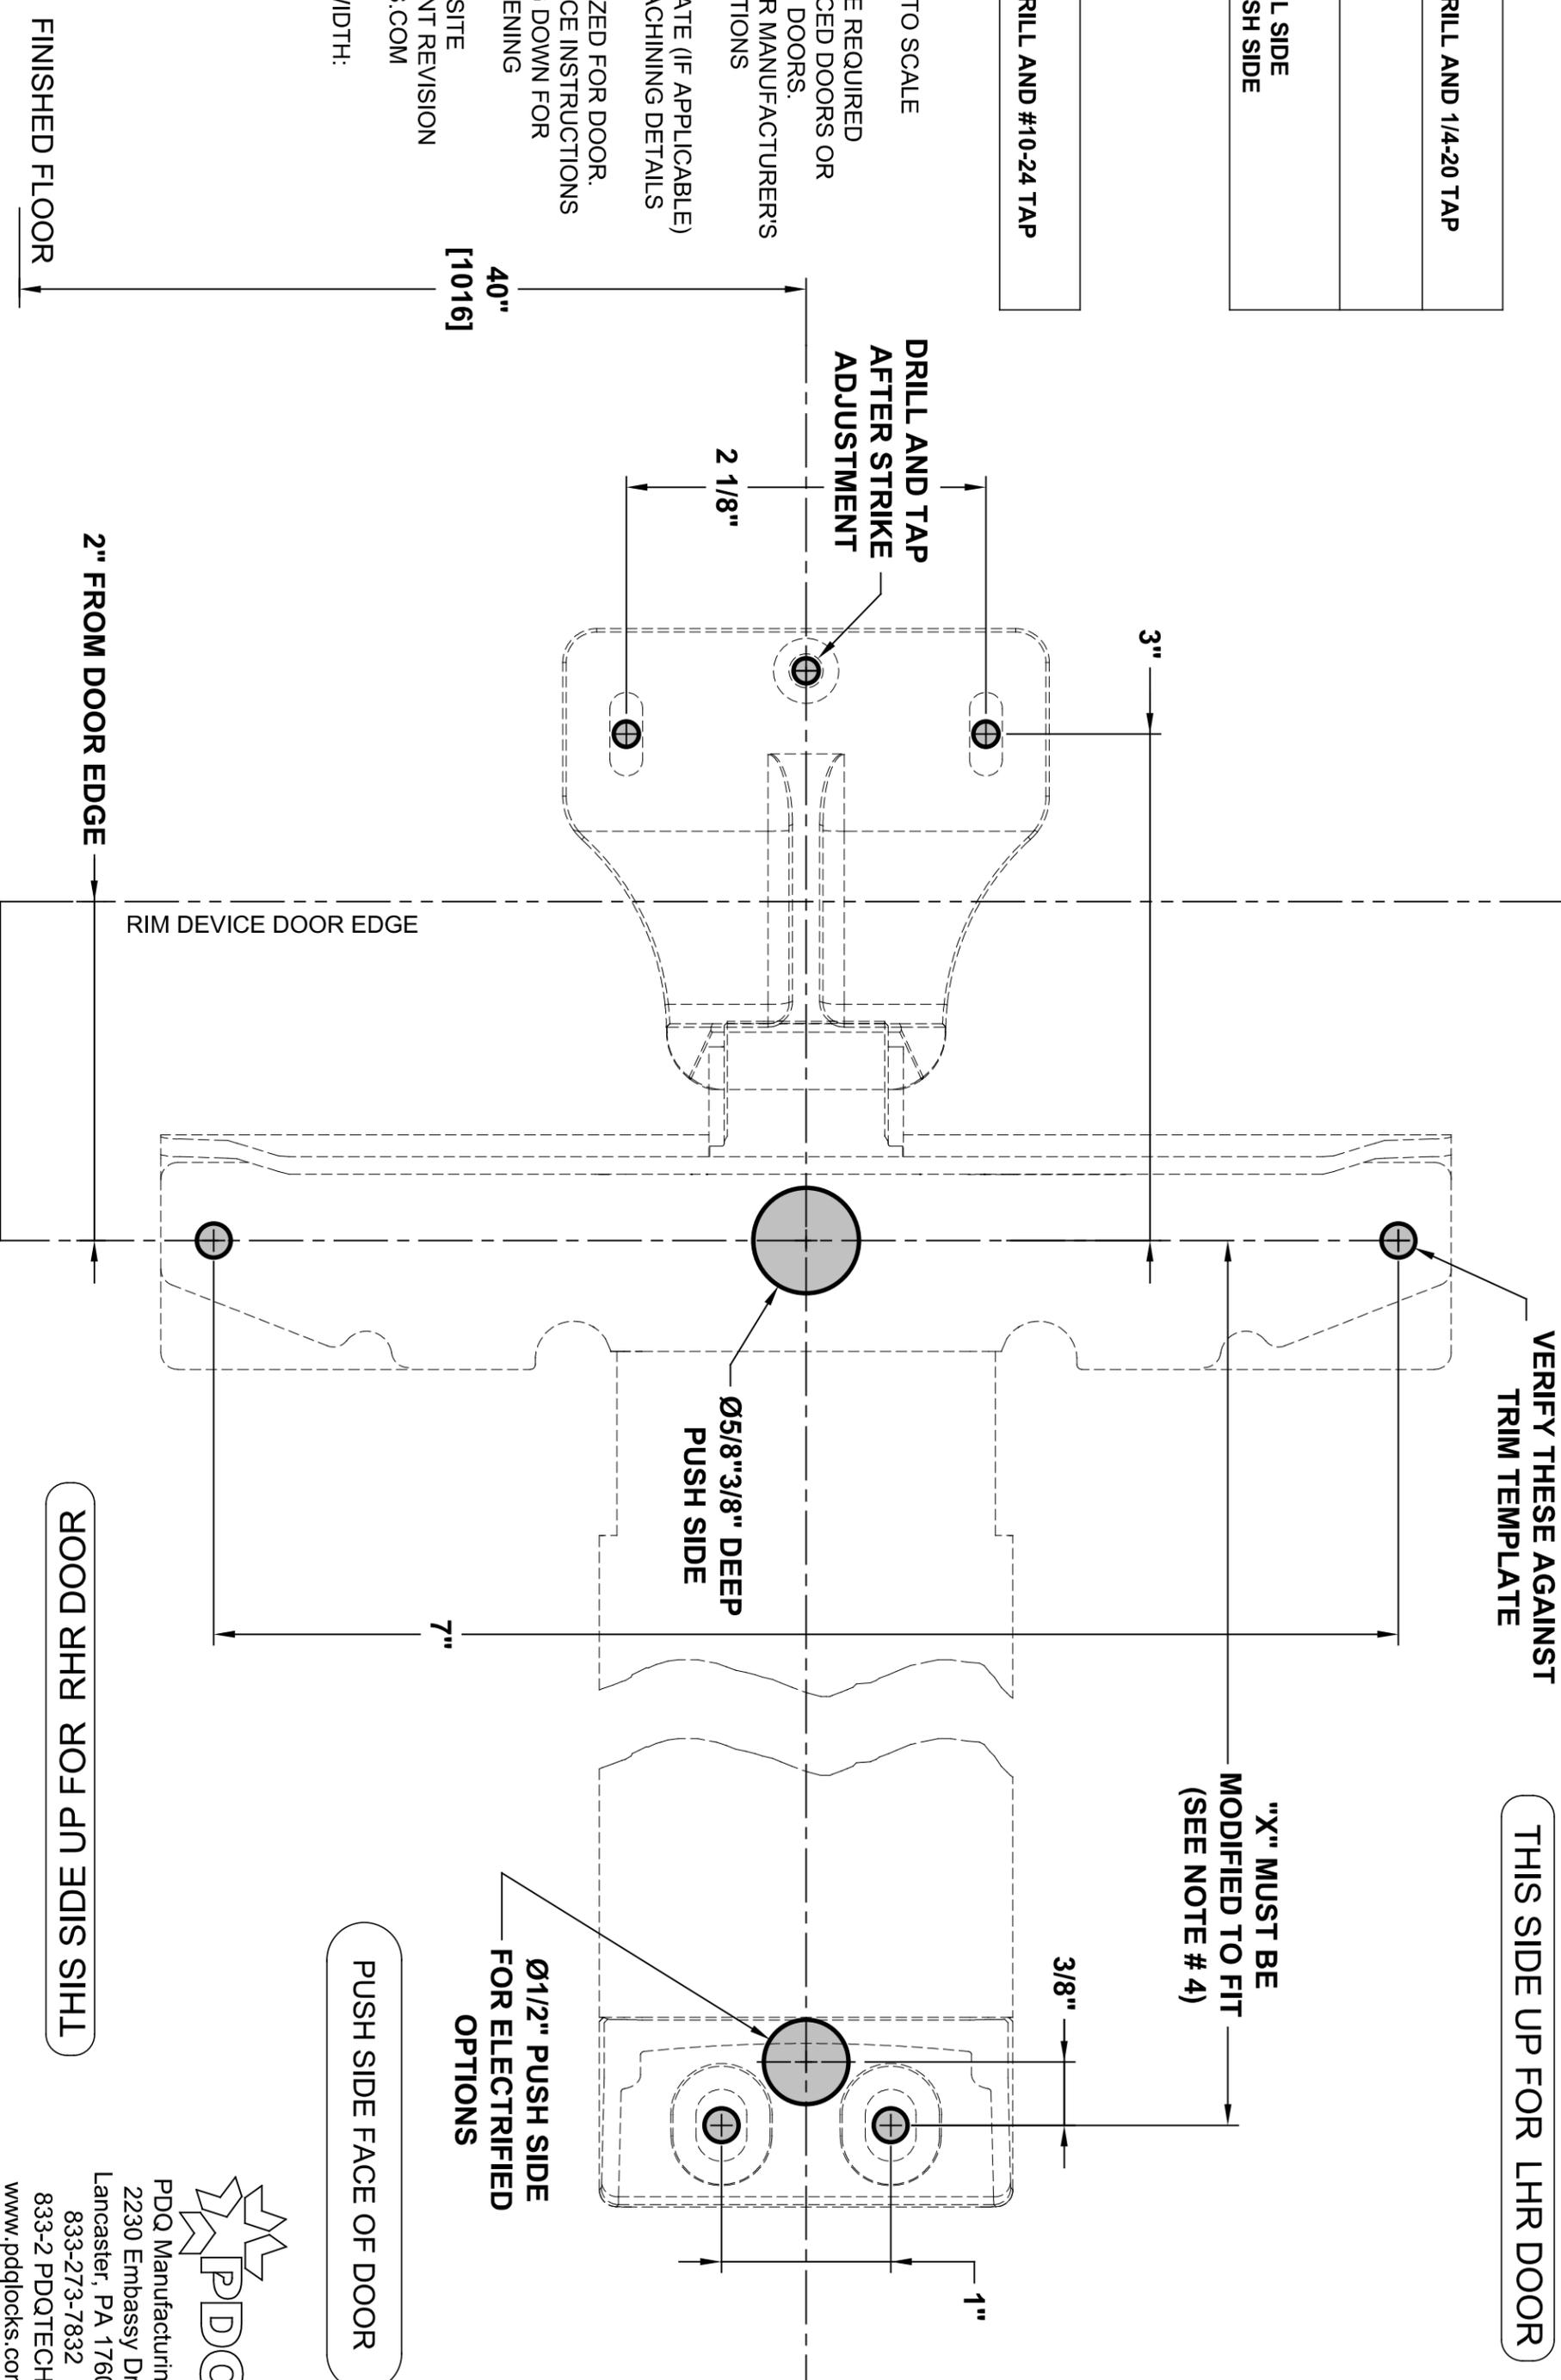

VERIFY THESE AGAINST TRIM TEMPLATE

THIS SIDE UP FOR LHR DOOR

"X" MUST BE MODIFIED TO FIT (SEE NOTE # 4)

Ø1/2" PUSH SIDE FOR ELECTRIFIED OPTIONS

PUSH SIDE FACE OF DOOR



PDQ Manufacturing
2230 Embassy Dr.
Lancaster, PA 17603
833-273-7832
833-2 PDQTECH
www.pdqlocks.com