ESCUTCHEON LEVER AND BALL KNOB TRIM

TEMPLATE: W53503
REV. 6 08-22-2022

MORTISE FUNCTIONS MR114 MR128 MR137
MR138 MR157 MR158
MR159 MR186 MR200

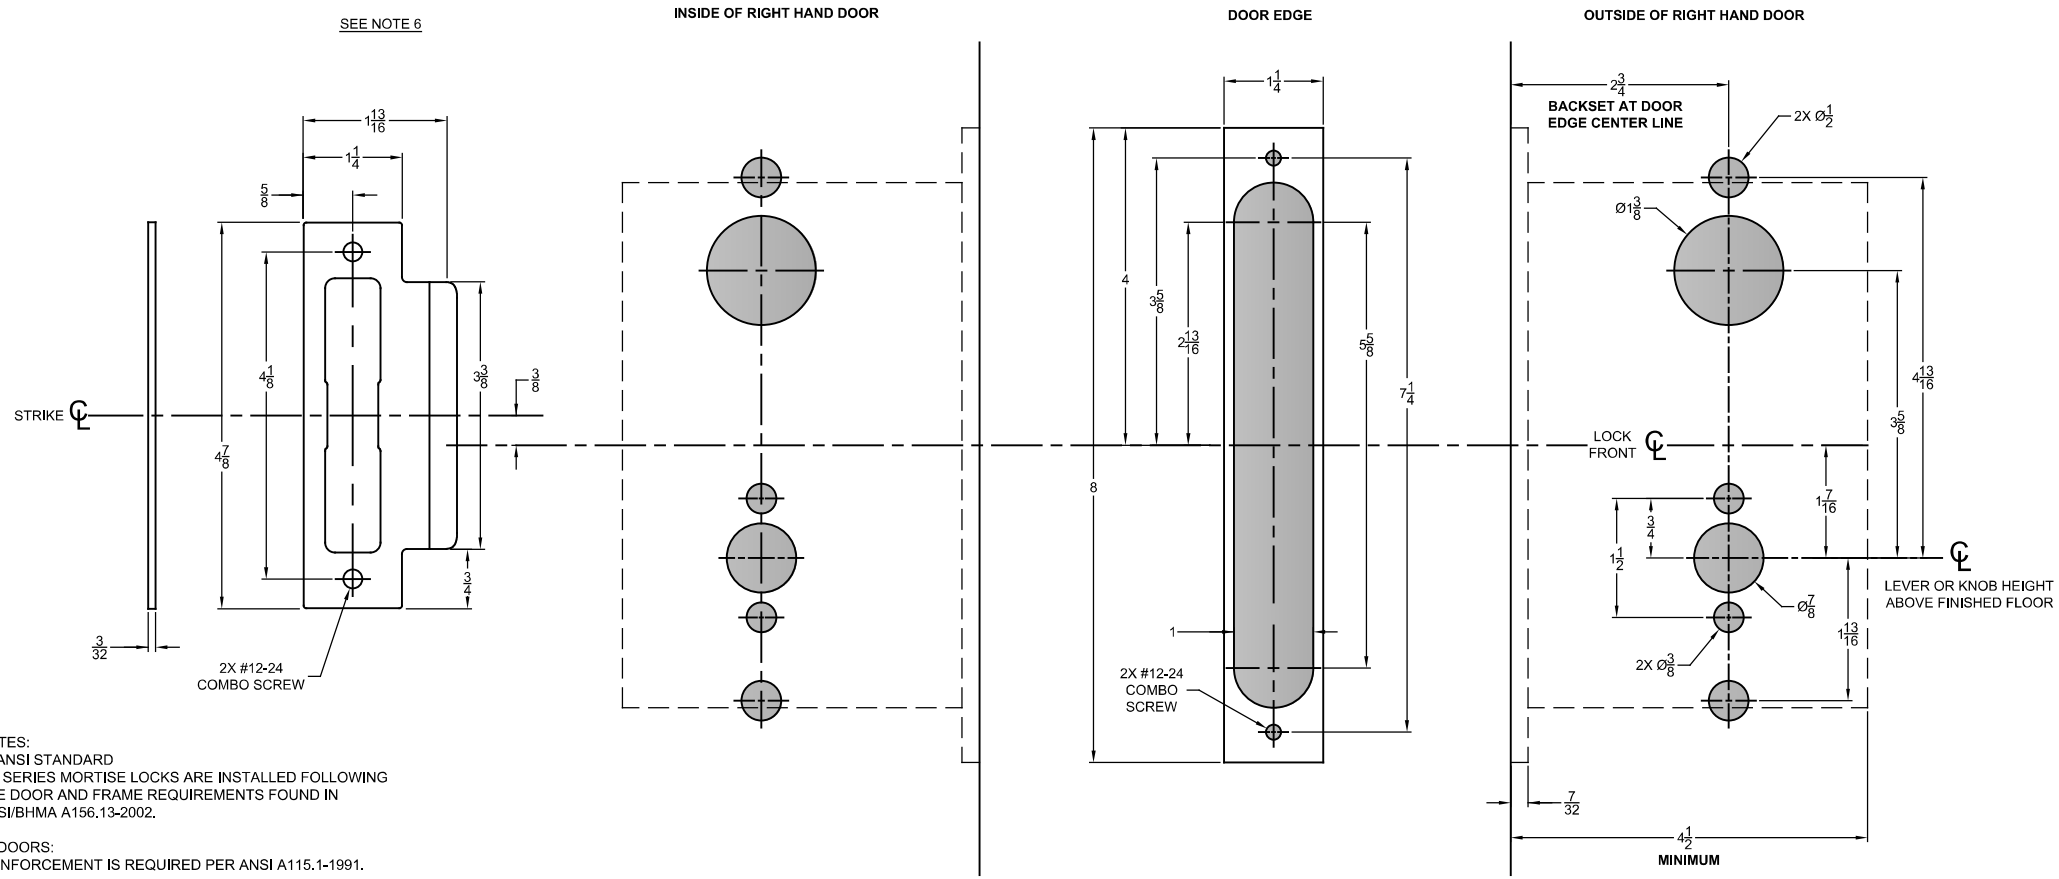

NOTES:
1. ANSI STANDARD
MR SERIES MORTISE LOCKS ARE INSTALLED FOLLOWING THE DOOR AND FRAME REQUIREMENTS FOUND IN ANSI/BHMA A156.13-2002.

2. DOORS:
REINFORCEMENT IS REQUIRED PER ANSI A115.1-1991.

3. DOOR THICKNESS:
STANDARD DOOR THICKNESS IS 1-¾ ". CONSULT FACTORY FOR OTHER DOOR SIZES.

4. LEAD LINING:
ADD ⅛" TO MORTISE WIDTH WHEN PREPARING DOOR FOR A LEAD LINED MR SERIES MORTISE LOCK BODY.

5. SILENCERS AND WEATHER STRIPPING:
PROVISIONS MUST BE MADE TO ALLOW PROPER DOOR CLOSURE WHEN USING DOOR SILENCERS, WEATHER STRIPPING OR SOUND PROOFING.

6. DIMENSIONS FOR STRIKE ARE NOT APPLICABLE FOR THE ELECTRIC STRIKE. SEE ELECTRIC STRIKE MANUFACTURERS TEMPLATE FOR DETAILS.

PDQ Manufacturing
2230 Embassy Dr.
Lancaster, PA 17603
833-273-7832
833-2 PDQTECH
www.pdqlocks.com