


8500 SERIES

ELECTRIC STRIKES

ARCHITECTURAL SUBMITTAL SHEET

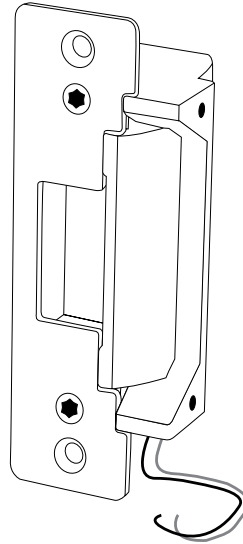

**85001 / 85003
Electric Strike**

SPECIFICATIONS

85001 ELECTRIC STRIKE:	<ul style="list-style-type: none"> Designed for use with all PDQ Grade 1 and Grade 2 Cylindrical Locks
85003 ELECTRIC STRIKE:	<ul style="list-style-type: none"> Designed for use with all PDQ MR Series Mortise Locks WITHOUT Deadbolt
FEATURES:	<ul style="list-style-type: none"> Input voltage: 12-24 VD Field changeable from FAIL SECURE to FAIL SAFE Factory tested to 1,000,000 cycle
CURRENT:	<ul style="list-style-type: none"> 0.28A @ 12VD 0.14A @ 24 VDC
FINISH:	<ul style="list-style-type: none"> 630 (US32D) Satin Stainless Steel

ELECTRIC STRIKES

Designed for use with PDQ's Grade 1 Mortise Locks, Grade 1 and 2 Cylindrical Locks

PART NO.	DESCRIPTION
85001	For Cylindrical Locks, 630 finish
85003	For Mortise locks (no Deadbolt), 630 finish

NOTE: Check with Factory for other finishes.