


# 8500 SERIES

# ELECTRIC STRIKES

## ARCHITECTURAL SUBMITTAL SHEET

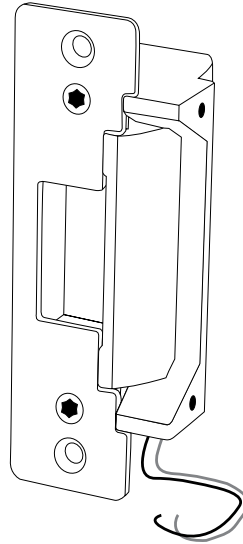

**85001 / 85003  
Electric Strike**

## SPECIFICATIONS

<b>85001 ELECTRIC STRIKE:</b>	<ul style="list-style-type: none"><li>• Designed for use with all PDQ Grade 1 and Grade 2 Cylindrical Locks</li></ul>
<b>85003 ELECTRIC STRIKE:</b>	<ul style="list-style-type: none"><li>• Designed for use with all PDQ MR Series Mortise Locks WITHOUT Deadbolt</li></ul>
<b>FEATURES:</b>	<ul style="list-style-type: none"><li>• Input voltage:12-24 VD</li><li>• Field changeable from FAIL SECURE to FAIL SAFE</li><li>• Factory tested to 1,000,000 cycle</li></ul>
<b>CURRENT:</b>	<ul style="list-style-type: none"><li>• 0.28A @ 12VD</li><li>• 0.14A @ 24 VDC</li></ul>
<b>FINISH:</b>	<ul style="list-style-type: none"><li>• 630 (US32D) Satin Stainless Steel</li></ul>

## ELECTRIC STRIKES

Designed for use with PDQ's Grade 1 Mortise Locks, Grade 1 and 2 Cylindrical Locks

PART NO.	DESCRIPTION
85001	For Cylindrical Locks, 630 finish
85003	For Mortise locks (no Deadbolt), 630 finish

**NOTE:** Check with Factory for other finishes.