





**ASSEMBLED
IN THE USA**


ARCHITECTURAL SUBMITTAL SHEET

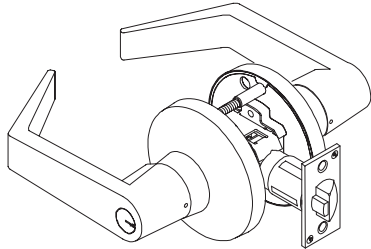

PHILADELPHIA (PHL) LEVER

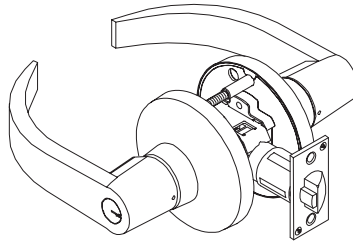

BOSTON (BSN) LEVER

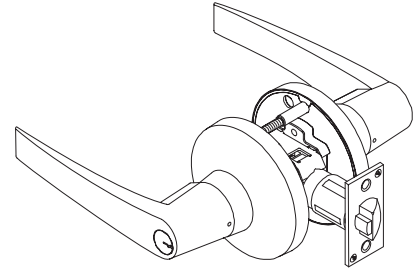

MIAMI (MIA) LEVER

SPECIFICATIONS



FOR DOORS:	<ul style="list-style-type: none"> • 1-3/8" to 1-3/4" thick • Preset for 1-3/4" door
APPLICATION:	<ul style="list-style-type: none"> • Through door thru-bolting • Fits 160 and 161 Door prep
BACKSET:	<ul style="list-style-type: none"> • 2-3/4" standard • 2-3/8", 5" optional
CHASSIS:	<ul style="list-style-type: none"> • Heavy duty zinc diecast, investment cast, cold rolled steel, stainless steel mechanism
FRONT:	<ul style="list-style-type: none"> • 2-1/4" x 1-1/8" or 2-1/4" x 1" • Stainless Steel or Wrought Brass • Beveled 1/8" on 2"
STRIKE:	<ul style="list-style-type: none"> • ASA standard • Stainless Steel or Wrought Brass • T-Strike or Full Lip Strike optional
LEVERS:	<ul style="list-style-type: none"> • Philadelphia, Boston, Miami
ROSE:	<ul style="list-style-type: none"> • 3-3/8" DIA Wrought
LATCHBOLT:	<ul style="list-style-type: none"> • 1/2" Throw
HAND:	<ul style="list-style-type: none"> • Non-handed
TRIM:	<ul style="list-style-type: none"> • Solid Zinc diecast PHL, BSN or MIA Levers • 65° Lever Rotation • Wrought Brass Roses • Concealed Screws
KEYS:	<ul style="list-style-type: none"> • Two (2) per Lock
KEYWAYS:	<ul style="list-style-type: none"> • SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
INTERCHANGEABLE CORE:	<ul style="list-style-type: none"> • Available for all keyed functions • Large Format IC Core available for PHL Lever ONLY. For other lever shapes, contact PDQ Customer Service. • 6 or 7-pin • Compatible with Best, Falcon & Arrow
CYLINDER:	<ul style="list-style-type: none"> • 6-pin Brass Insert Cylinder keyed to 5-pins
KEYING:	<ul style="list-style-type: none"> • Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) Can be keyed into existing master key systems
FINISHES:	<ul style="list-style-type: none"> • 605 (US3), 606 (US4), 612 (US10), 613 (US10B), 625 (US26), 626 (US26D) • Optional Antimicrobial Coating
CERTIFICATIONS, LISTINGS, COMPLIANCES:	<ul style="list-style-type: none"> • UL listed for 3 hrs, for single doors up to 4'0" x 8'0" • Certified to ANSI/BHMA 156.2, Grade 2 • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
WARRANTY:	<ul style="list-style-type: none"> • Eight (8) Year Limited Warranty
COUNTRY OF ORIGIN:	<ul style="list-style-type: none"> • Assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act.

‡ Available with antimicrobial coating, technology that is known to inhibit the growth of microbes.