

GT SERIES

GRADE 1 EXTRA HEAVY DUTY CYLINDRICAL LOCK




**ASSEMBLED
IN THE USA**

ARCHITECTURAL SUBMITTAL SHEET



CYCLE TESTED — OVER 3X BHMA STANDARD

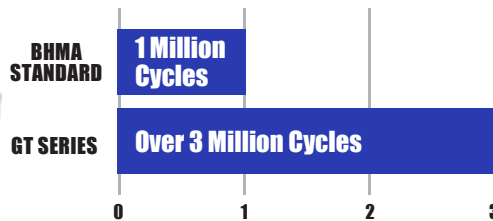

LEVER TORQUE TESTED — OVER 3X BHMA STANDARD



SPECIFICATIONS



FOR DOORS:	<ul style="list-style-type: none"> • 1-3/4" to 2-1/4" thick • Preset for 1-3/4" door
APPLICATION:	<ul style="list-style-type: none"> • Through door thru-bolting
DOOR PREP:	<ul style="list-style-type: none"> • Standard ANSI A156.115 (161) for Cylindrical Locks
BACKSET:	<ul style="list-style-type: none"> • 2-3/4" Standard. 2-3/8", 3-3/4" and 5" Optional (Ordered from factory only).
CHASSIS:	<ul style="list-style-type: none"> • Heavy duty zinc diecast, investment cast, chromated cold rolled steel, stainless steel and EZAC™ diecast mechanism. Billet Steel spindles for locking functions
FRONT:	<ul style="list-style-type: none"> • 2-1/4" x 1-1/8" • Stainless Steel or Wrought Brass • Beveled 1/8" in 2"
STRIKE	<ul style="list-style-type: none"> • ASA standard • T-Strike or Full Lip Strike optional • Stainless Steel or Wrought Brass
LEVERS:	<ul style="list-style-type: none"> • Philadelphia, Boston, Miami
ROSE:	<ul style="list-style-type: none"> • 3-3/8" DIA Wrought
LATCHBOLT:	<ul style="list-style-type: none"> • 9/16" Throw Deadlocking • 3/4" Latch projection for available as option.
HAND:	<ul style="list-style-type: none"> • Non-handed
TRIM:	<ul style="list-style-type: none"> • Solid Zinc diecast PHL, BSN or MIA Levers • 41° Lever Rotation Standard with 2-3/4" backset • Wrought Brass Roses, Concealed Screws • 65° Lever Rotation Standard with 3/4" latch for double doors (Ordered from factory only) and all 2-3/8", 3-3/4" and 5" backsets (Ordered from factory only)
KEYS:	<ul style="list-style-type: none"> • Two (2) per Lock
KEYWAYS	<ul style="list-style-type: none"> • SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
INTERCHANGEABLE CORE:	<ul style="list-style-type: none"> • Available for all keyed functions • 6 or 7-pin • Large Format IC Core available for PHL Lever ONLY. • Compatible with Best, Falcon and Arrow.
CYLINDER:	<ul style="list-style-type: none"> • 6-pin Brass Insert Cylinder keyed to 5-pins
KEYING:	<ul style="list-style-type: none"> • Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) Can be keyed into existing master key systems
FINISHES:	<ul style="list-style-type: none"> • 605 (US3), 606 (US4), 612 (US10), 613 (US10B), 625 (US26), 626 (US26D) • Optional Antimicrobial Coating 626 (USD26D) only‡
CERTIFICATIONS, LISTINGS, COMPLIANCES:	<ul style="list-style-type: none"> • UL listed for 3 hrs, for single doors up to 4'0" x 8'0" • Certified to ANSI/BHMA A156.2, Grade 1 • California Education Code Compliant (Functions GT135, GT135LED, GT145) • Federal Specification FF-H-10C (Superseded by A156.2) • Approved for Florida HVHZ (High Velocity Hurricane Zone). PDQ Product Approval: FL 21376. Design load rating: ± 70.0 PSF for single door (3' x 7') • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
WARRANTY:	<ul style="list-style-type: none"> • Twenty-five (25) year Limited Warranty
COUNTRY OF ORIGIN:	<ul style="list-style-type: none"> • Proudly Assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act.

‡ Available with antimicrobial powder coating, treated with silver ionic technology that is known to inhibit the growth of microbes.



www.pdqlocks.com