


ARCHITECTURAL SUBMITTAL SHEET

FEATURES

- Keyed removable mullion is designed and UL listed for fire rated pairs of doors
- Designed for quick removal from the top bracket by a simple operation of the rim cylinder
- Once the mullion is removed, carts, gurneys, large machines can freely pass through the opening
- When the mullion is re-installed, the unit will self lock in place without the need for a key
- Mullion storage kits are available providing a safe and convenient way to store the mullion when removed
- Each keyed removable mullion set includes top and bottom bracket set, mullion tube and shims
- **Rim cylinder sold separately**

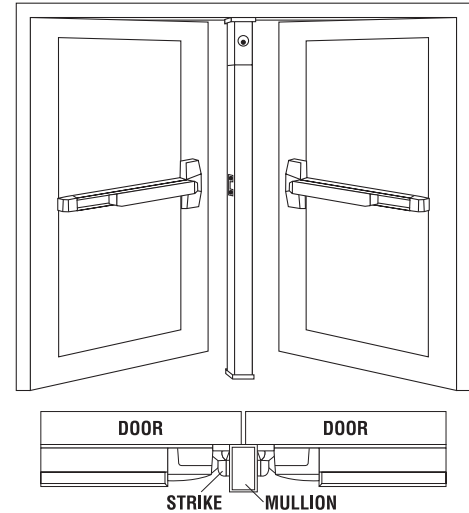

SPECIFICATIONS



TUBE DIMENSIONS:	• 2" W x 3" D • 1/8" wall thickness • 11 Gauge steel tube
CYLINDER TYPE:	• RIM - Furnished less cylinder, see cylinders section of this price list.
SIZE:	• 8' and 10' sizes available in Fire and Non-Fire Rated styles
COLOR:	• Primed
CERTIFICATIONS, LISTINGS, COMPLIANCES:	<ul style="list-style-type: none"> • UL10C Listed for "Fire Exit Hardware" labeled for up to 3 hours • Florida Building Code HVHZ listed (9200MF in conjunction with PDQ 6200 rim devices) • Meets requirements of the Buy American Act.
WARRANTY:	• One (1) year limited warranty

MULLIONS - KEY REMOVABLE

PART	DESCRIPTION
9200M-11	Mullion, 8' non-fire rated
9200MA-11	Mullion, 10' non-fire rated
9200MF-11	Mullion, 8' fire rated

Notes: 1 - Fire Rated mullion listed only when used with PDQ's 6200 Fire Rated Devices. Use with anyother device will void UL Fire Rating.
2 - Mullions shipped UPS will be assessed an \$8.00 handling up charge.

ACCESSORIES

PART	DESCRIPTION
929012F	Mullion Fire Strike (Includes fasteners)
929010	Mullion Storage Kit

Note: Strike sold as replacement only. Must provide Order number of previous purchased item.