


ARCHITECTURAL SUBMITTAL SHEET



**SX SERIES
(CQ) BALL KNOB**

SPECIFICATIONS

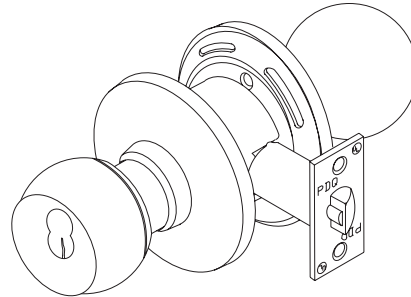

FOR DOORS:	<ul style="list-style-type: none"> • 1-3/8" to 2" thick.
DOOR PREP:	<ul style="list-style-type: none"> • Fits Standard 160 or 161 door prep.
BACKSET:	<ul style="list-style-type: none"> • 2-3/4" Standard, 2-3/8", 3-3/4" and 5" Optional.
CASE:	<ul style="list-style-type: none"> • Steel, Yellow Chromate Plate.
FRONT:	<ul style="list-style-type: none"> • 2-1/4" x 1-1/8" or 2-1/4" x 1" • Stainless Steel or Wrought Bronze.
STRIKE:	<ul style="list-style-type: none"> • 4-7/8" x 1-1/4" (ASA), "T" or "FL" Strike Optional. • Stainless Steel or Wrought Bronze.
ROSE:	<ul style="list-style-type: none"> • 3" DIA Wrought
KNOB:	<ul style="list-style-type: none"> • Stainless Steel.
KEYWAYS:	<ul style="list-style-type: none"> • SCC Standard (Schlage C Compatible) • Available in Keyways of Most Major Manufacturers.
INTERCHANGEABLE CORE:	<ul style="list-style-type: none"> • Available for all keyed functions • 6 or 7-pin • Compatible with Best, Falcon and Arrow.
KEYING:	<ul style="list-style-type: none"> • Standard Core is available and can be MK, CMK, GMK, or CK. Available Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA). Can be keyed into existing master key systems of other manufacturers.
FINISHES:	<ul style="list-style-type: none"> • 630 (US32D).
CERTIFICATIONS, LISTINGS, COMPLIANCES:	<ul style="list-style-type: none"> • Certified to ANSI/BHMA A156.2, Grade 1 • UL listed for 3 hrs, for single doors up to 40" x 80"
WARRANTY:	<ul style="list-style-type: none"> • Five (5) Year Limited Warranty