



KM, KT,
KV Series
Bored Deadbolts

MJ Series
Mortise Deadbolts



KM SERIES BORED DEADBOLT



KV SERIES BORED DEADBOLT



MJ SERIES MORTISE DEADBOLT



KV SERIES PRIVACY INDICATORS

TABLE OF CONTENTS






KT SERIES BORED DEADBOLTS	2-3
KM SERIES BORED DEADBOLTS	4-5
KV SERIES BORED DEADBOLTS	6-7
KV SERIES BORED DEADBOLTS WITH PRIVACY INDICATORS	8
MJ SERIES MORTISE DEADBOLTS.....	9-11
FINISHES	11

KT Series (Extra Heavy Duty Commercial Grade)

- FOR DOORS:** • 1-3/8" to 1-3/4" thick
- DOOR PREP:** • 2-1/8" DIA
- BACKSET:** • 2-3/4" ((Default)) • 2-3/8" available
- FRONT:** • 2-1/4" x 1-1/8" or 2-1/4" x 1" • Stainless Steel or Wrought Brass
- STRIKE:** • 2-3/4" x 1-1/8" • Stainless Steel or Wrought Brass
- DEADBOLT:**
 - 1" Throw
 - Brass Bolt containing two concealed 1/4" case-hardened Steel Roll Pins
- HAND:** • Non-handed
- TRIM:** • Wrought Brass Scalp • Reinforced Zinc Diecast Rose
- KEYS:** • Two (2) per Lock
- KEYWAYS:**
 - SCC standard (Schlage C Compatible)
 - Also available in keyways of other manufacturers
- CYLINDER:** • 6-pin Brass Mortise Cylinder keyed to 5-pins
- KEYING:**
 - Options: MK, CMK or GMK
 - Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA)
 - Can be keyed into existing master key systems
- FINISHES:** • 605 (US3) - Bright Brass, 606 (US4) - Satin Brass, 613 (US10B) - Oil Rubbed Bronze, 625 (US26) - Bright Chrome Or 626 (US26D) - Satin Chrome
- WARRANTY:** • One (1) year Limited Warranty
- COUNTRY OF ORIGIN:** • Assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act.



FUNCTIONS

FUNCTION	FUNCTION NUMBER	INSIDE OUTSIDE	DESCRIPTION	ANSI NUMBER
Single Cylinder	KT116		<ul style="list-style-type: none"> • Lock or unlock by key from outside, by thumb turn from inside 	E1151
Entrance	KT121		<ul style="list-style-type: none"> • Lock or unlock by key from outside • Blank mortise cylinder on inside 	E1161
Single Sided	KT125		<ul style="list-style-type: none"> • Deadbolt by inside thumb turn only • Blank mortise cylinder on outside 	E11111
Double Cylinder	KT137		<ul style="list-style-type: none"> • Lock or unlock by key from both sides 	E1141
Classroom	KT148		<ul style="list-style-type: none"> • Lock or unlock by key from outside • Turnpiece inside retracts deadbolt, but will not project it 	E1171

LET US HELP YOU — WIN MORE PROJECTS!!

PDQ offers complimentary key systems design, project quotation and cross reference services — To get started, contact our quote desk at 800-441-9692


SERIES	FINISH	CYLINDER OR HOUSING	KEYING
KT — KT Series	605 — Polished Brass 606 — Satin Brass 613 — Oil Rubbed Bronze 625 — Bright Chrome 626 — Satin Chrome	BLANK — Default L — Less Cylinder	KD — Keyed Different (Default) Others - See Keying Table
KT 116	630 234	— SCC	KD
See Function Table	234 — 2-3/4" (Default) 238 — 2-3/8"	SCC — Default Others - See Keyway Table	
FUNCTION NUMBER	BACKSET	KEYWAY	

ORDERING EXAMPLE: KT 116 626 234 D SCC KD

CYLINDER REFERENCE GUIDE



CONVENTIONAL MORTISE CYLINDER



LENGTH INCLUDES CAM

TYPE	LENGTH	PDQ CAM NUMBER
Conventional	1-1/8"	1127-4205

KEYWAYS

CONVENTIONAL CYLINDER	
KEYWAY	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC
PDQ Restricted	TA
Arrow AR1	ARA
Corbin 59A1	C059A1
Corbin 60	C06
Corbin L4	CL4
Ruswin D1	RUD
Ruswin 981	RUD981
Schlage E	SCE
Schlage C	SCC
Schlage C-K	SCC-K
Sargent LA	SAL
Sargent RA-RC	RA-RC
Yale E1R	YA8
Yale GA	GA
Falcon E-R	FAL
Kwikset	KW

KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"0" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK





KM Series (Heavy Duty Commercial Grade)



- FOR DOORS:** • 1-3/8" to 1-3/4" thick
- DOOR PREP:** • 2-1/8" DIA
- BACKSET:** • 2-3/4" (Default - UL Listed)
- Option – 2-3/4" - 2-3/8" adjustable with 2-1/4" x 1" faceplate available (Not UL Listed)
- FRONT:** • 2-1/4" x 1-1/8" • Stainless Steel or Wrought Brass
- STRIKE:** • 2-3/4" x 1-1/8" • Stainless Steel or Wrought Brass
- DEADBOLT:** • 1" Throw
- Brass Bolt containing one 1/4" case-hardened Steel Roll Pin
- THUMBTURN:** • ADA Compliant
- HAND:** • Non-handed
- TRIM:** • Stainless Steel or Wrought Brass Scalp
- Reinforced Zinc Diecast Rose
- KEYS:** • Two (2) per Lock
- KEYWAYS:** • SCC standard (Schlage C Compatible)
- Also available in keyways of other manufacturers
- INTERCHANGEABLE**
- CORE:** • Compatible with Best, Falcon and Arrow
- CYLINDER:** • 6-pin Brass RIM Cylinder keyed to 5-pins
- KEYING:** • Options: MK, CMK or GMK
- Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA)
- Can be keyed into existing master key systems
- FINISHES:** • 605 (US3) - Bright Brass, 606 (US4) - Satin Brass, 613 (US10B) - Oil Rubbed Bronze, 626 (US26D) - Satin Chrome, 630 (US32D) - Satin Stainless Steel
- CERTIFICATIONS, LISTINGS, COMPLIANCES:** • ANSI/UL 10C Listed, "Positive Pressure Fire Tests of Door Assemblies" for up to and including 3 hrs.
- Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
- WARRANTY:** • One (1) year Limited Warranty



FUNCTIONS

FUNCTION	FUNCTION NUMBER	INSIDE OUTSIDE	DESCRIPTION	ANSI NUMBER
Single Cylinder	KM116		<ul style="list-style-type: none"> • Lock or unlock by key from outside, by thumb turn from inside 	E1151
Double Cylinder	KM137		<ul style="list-style-type: none"> • Lock or unlock by key from both sides 	E1141
 Classroom	KM148		<ul style="list-style-type: none"> • Lock or unlock by key from outside • Turnpiece inside retracts deadbolt, but will not project it 	E1171

SERIES		FINISH		CYLINDER OR HOUSING		KEYING	
KM — KM Series		605 — Polished Brass 606 — Satin Brass 613 — Oil Rubbed Bronze 626 — Satin Chrome 630 — Satin Stainless Steel		BLANK — Default L — Less Cylinder SF6 — SFIC w/Core, 6 Pin SF7 — SFIC w/Core, 7 Pin SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing, less core		KD — Keyed Different (Default) Others - See Keying Table	
KM	116	630	234	—	SCC	KD	
See Function Table		234 — 2-3/4" (Default) ADJ — 2-3/4" and 2-3/8"		SCC — Default Others - See Keyway Table			
FUNCTION NUMBER		BACKSET		KEYWAY			

Ordering Example: KM 116 630 234 SCC KD

CYLINDER REFERENCE GUIDE



RIM SFIC HOUSING




SFIC CORE

TYPE	LENGTH
Conventional	—
SFIC Housing, 6 Pin	1-1/4"
SFIC Housing, 7 Pin	1-3/8"



RIM CYLINDER



KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE			
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR		
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R		
PDQ Restricted	TA				
Arrow AR1	ARA				
Corbin 59A1	C059A1				
Corbin 60	C06				
Corbin L4	CL4				
Russwin D1	RUD				
Russwin 981	RUD981				
Schlage E	SCE			PDQ Exclusive	PDQ1
Schlage C	SCC			PDQ Exclusive and Restricted	PDQ2
Schlage C-K	SCC-K				PDQ3
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

KEYING





DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

KV Series (Standard Duty Commercial Grade)

- FOR DOORS:** • 1-3/8" to 1-3/4" thick
- DOOR PREP:** • 2-1/8" DIA
- BACKSET:** • 2-3/4" (Factory Default) adjustable to 2-3/8"
- FRONT:** • 2-1/4" x 1"
- Stainless Steel or Wrought Brass
- STRIKE:** • 2-3/4" x 1-1/8"
- Stainless Steel or Wrought Brass
- DEADBOLT:** • 1" Throw
- Brass Bolt containing one 1/4" case-hardened Steel Roll Pin
- HAND:** • Non-handed
- TRIM:** • Stainless Steel or Wrought Brass Scalp
- KEYS:** • Two (2) per Lock
- KEYWAYS:** • SCC standard (Schlage C Compatible)
- Also available in keyways of other manufacturers
- INTERCHANGEABLE CORE:** • 6 or 7-pin
- Compatible with Best, Falcon and Arrow
- CYLINDER:** • 6-pin Brass Insert Cylinder keyed to 5-pins
- KEYING:** • Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA)
- Can be keyed into existing master key systems
- FINISHES:** • 605 (US3) - Bright Brass, 606 (US4) - Satin Brass, 613 (US10B) - Oil Rubbed Bronze, 626 (US26D) - Satin Chrome or 630 (US32D) - Satin Stainless Steel
- WARRANTY:** • One (1) year Limited Warranty



FUNCTIONS

FUNCTION	FUNCTION NUMBER	INSIDE OUTSIDE	DESCRIPTION	ANSI NUMBER
Single Cylinder	KV116		<ul style="list-style-type: none"> • Lock or unlock by key from outside, by thumb turn from inside 	E2152
Single Sided	KV125		<ul style="list-style-type: none"> • Deadbolt by inside thumb turn only • Special door preparation required • Surface mounted, 1-3/4" bore hole, one side 	E2192
Single Sided	KV125 BK		<ul style="list-style-type: none"> • Deadbolt by inside thumb turn only • 2-1/8" bore hole, one side • Backplate opposite side of thumb turn. 	E21112
Double Cylinder	KV137		<ul style="list-style-type: none"> • Lock or unlock by key from both sides 	E2142

SERIES		FINISH		CYLINDER OR HOUSING		KEYING	
KV — KV Series		605 — Polished Brass 606 — Satin Brass 613 — Oil Rubbed Bronze 626 — Satin Chrome 630 — Satin Stainless Steel		BLANK — Default L — Less Cylinder SF6 — SFIC w/Core, 6 Pin SF7 — SFIC w/Core, 7 Pin SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing, less core		KD — Keyed Different (Default) Others - See Keying Table	
KV	116	630	ADJ	—	SCC	KD	
See Function Table		ADJ — 2-3/4" and 2-3/8"		SCC — Default Others - See Keyway Table			
FUNCTION NUMBER		THUMBTURN		KEYWAY			

Ordering Example: KV 116 630 ADJ SCC KD

CYLINDER REFERENCE GUIDE



CONVENTIONAL
KEY IN KNOB/
LEVER CYLINDER



RIM
SFIC HOUSING



SFIC CORE

KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE			
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR		
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R		
PDQ Restricted	TA				
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4				
Russwin D1	RUD				
Russwin 981	RUD981				
Schlage E	SCE			PDQ Exclusive	PDQ1
Schlage C	SCC			PDQ Exclusive and Restricted	PDQ2
Schlage C-K	SCC-K		PDQ3		
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"0" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

KV SERIES with PRIVACY INDICATOR (LIGHT DUTY COMMERCIAL GRADE)

- PRIVACY INDICATOR:** • Symbol showing Unoccupied- Occupied
- THUMBTURN:** • ADA Compliant
- FOR DOORS:** • 1-3/8" to 1-3/4" Thick
- BACKSET:** • 2-3/4" (Factory Default) adjustable to 2-3/8"
- DOOR PREP:** • 2-1/8" DIA
- FACEPLATE:** • 1" x 2-1/4"
- STRIKE:** • 1-1/8" x 2-3/4"
- DEADBOLT:** • 1" Throw with hardened steel roller
- Brass Bolt containing one concealed 1/4" case-hardened Steel Roll Pin
- TRIM:** • Wrought Brass
- KEYS:** • Emergency Key Included
- FINISHES:** • 613 (US10B) Oil Rubbed Bronze, 626 (US26D) Satin Chrome
- WARRANTY:** • One (1) year Limited Warranty




UNOCCUPIED



OCCUPIED

FUNCTIONS

FUNCTION	FUNCTION NUMBER	INSIDE OUTSIDE	DESCRIPTION	ANSI NUMBER
Single Sided	KV125IND		<ul style="list-style-type: none"> • No key outside • Indicator outside • Thumbturn inside extends/retracts deadbolt • Emergency key outside retracts deadbolt 	E2192

HOW TO ORDER

SERIES	FUNCTION NUMBER	FINISH	BACKSET
KV	125IND	626	ADJ - 2-3/4" AND 2-3/8"

ORDERING EXAMPLE: KV 125IND 626 ADJ

MJ SERIES MORTISE DEADBOLTS



SHOWN WITH STANDARD THUMBTURN



SHOWN WITH OPTIONAL "ADA" THUMBTURN

SPECIFICATIONS

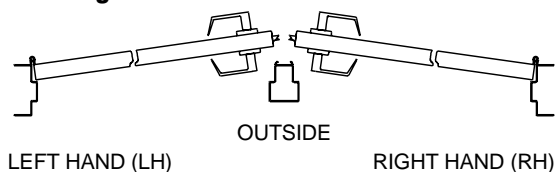
- FOR DOORS:** • 1-3/4"
- BACKSET:** • 2-3/4"
- CASE:** • Steel—Dichromated for corrosion resistance.
- FACEPLATE:** • 1-1/4" x 5-5/8"
- FRONT:** • 2-1/4" x 1" • Stainless Steel or Wrought Brass
- STRIKE:** • 1-1/8" x 2-1/2"
- DEADBOLT:** • 1" Throw • Stainless Steel
- OPTIONAL THUMBTURN:** • ADA Compliant
- HAND:** • Non-handed except for function MJ134 Classroom (See Function Table and How to Order Guide).
- KEYS:** • Two (2) per Lock
- KEYWAYS:** • SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
- INTERCHANGEABLE CORE:** • 6 or 7-pin • Compatible with Best, Falcon & Arrow • Large Format IC Cores compatible with Schlage.
- CYLINDER:** • 6 or 7-pin Mortise Cylinder
- KEYING:** • Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA)
 - Can be keyed into existing master key systems
- FINISHES:** • 630 (US32D) - Satin Stainless Steel
- CERTIFICATIONS, LISTINGS, COMPLIANCES:** • ANSI/UL 10C Listed, "Positive Pressure Fire Tests of Door Assemblies" for up to and including 3 hrs.
- WARRANTY:** • Meets requirements of the Buy American Act.
 - 10-Year Limited Warranty

CROSS REFERENCE

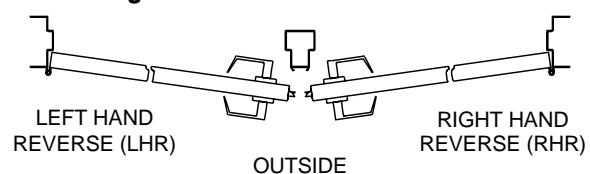
ANSI # A156.5 (A156.13)	PDQ FUNCTION	BEST	CORBIN	DORMA	MARKS #31/32/33 SERIES	SARGENT	SCHLAGE	YALE
E06081 (F18)	MJ131	48H L	DL4111	D961	L	4876	L464	353
E06071 (F17)	MJ132	48H K	DL4113	D960	K	4875	L460	352
E06061 (F16)	MJ133	48H M	DL4112	D962	M	4874	L462	351
E06091 (F29)	MJ134LH	48H R	DL4117	D963	S	4877	L463	357
	MJ134LH							

HANDING

In Swing Door



Out Swing Door



MJ SERIES MORTISE DEADBOLTS

FUNCTIONS

FUNCTION	FUNCTION NUMBER	OUTSIDE INSIDE	DESCRIPTION	ANSI NUMBER A156.5(A156.13)
Single Cylinder	MJ131		<ul style="list-style-type: none"> • Key outside extends/retracts deadbolt 	E06081 (F18)
Single Cylinder with Thumbturn	MJ132		<ul style="list-style-type: none"> • Key outside extends/retracts deadbolt • Thumbturn inside extends/retracts deadbolt 	E06071 (F17)
Double Cylinder	MJ133		<ul style="list-style-type: none"> • Key outside extends/retracts deadbolt • Key inside extends/retracts deadbolt 	E06061 (F16)
Single Cylinder (Classroom) Left Hand	MJ134LH		<ul style="list-style-type: none"> • Key outside extends/retracts deadbolt • Inside cylinder turn retracts but does not extend deadbolt • Thumbturn rotates clockwise 	E06091 (F29)
Single Cylinder (Classroom) Right Hand	MJ134RH		<ul style="list-style-type: none"> • Key outside extends/retracts deadbolt • Inside cylinder turn retracts but does not extend deadbolt • Thumbturn rotates counter-clockwise 	E06091 (F29)


SERIES	FINISH	CYLINDER OR HOUSING	KEYING
MJ — Mortise Deadbolts	630 — Satin Stainless Steel	BLANK — Default L — Less Cylinder SF6 — SFIC w/Core, 6 Pin SF7 — SFIC w/Core, 7 Pin LF — Schalgel® Compatible LFIC w/Core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing, less core LFL — Schalgel® Compatible LFIC Housing less core	KD — Keyed Different (Default) Others - See Keying Table
MJ 131	630 —	— SCC	KD
See Function Table	ADA — ADA Compliant Thumbturn	SCC — Default Others - See Keyway Table	
FUNCTION NUMBER	THUMBTURN	KEYWAY	

Ordering Example: MJ 131 630 SCC KD

CYLINDER REFERENCE GUIDE



CONVENTIONAL MORTISE CYLINDER



LENGTH INCLUDES CAM



MORTISE SFIC HOUSING



SFIC CORE



LFIC CORE

TYPE	LENGTH	PDQ CAM NUMBER
Conventional	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231

MJ SERIES MORTISE DEADBOLTS

KEYWAYS

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC (Default)
PDQ Restricted	TA				
Arrow AR1	ARA				
Corbin 59A1	CO59A1				
Corbin 60	CO6				
Corbin L4	CL4				
Russwin D1	RUD			PDQ Exclusive	PDQ1
Russwin 981	RUD981				PDQ2
Schlage E	SCE			PDQ Exclusive and Restricted	PDQ3
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				

KEYING

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

FINISHES

(SEE INDIVIDUAL SERIES FOR SPECIFIC FINISHES AVAILABLE)

ARCHITECTURAL



605 (US3)
Bright Brass, Clear Coated



606 (US4)
Satin Brass, Clear Coated



613 (US10B)
Oil Rubbed Bronze



625 (US26)
Bright Chromium Plated,
No Coating



626 (US26D)
Satin Chromium Plated,
No Coating



630 (US32D)
Satin Stainless Steel,
No Coating

Finishes shown are representative only. PDQ cannot guarantee that product shipped will match finishes shown. Not all products are available in all finishes listed.

WHEN TIME EQUALS MONEY

PDQ'S *PRIORITY QUICKSHIP* DELIVERS

AUBURN, WA

SALT LAKE CITY, UT

KANSAS CITY, MO

**2754 CREEK HILL ROAD
LEOLA, PA 17540**

Our Four Distribution Centers are ideally located to provide quick delivery throughout the entire United States. Priority Quickship items will ship same day or next day after the order is received. Contact your sales representative or PDQ Customer Service for more information.



Headquarters: 2754 Creek Hill Road • Leola, PA 17540 • 800.441.9692 • 717.656.6892 Fax
Regional Distribution Centers: Kansas City, MO, Salt Lake City, UT, Seattle, WA
www.pdqlocks.com

PDQ'S Deadbolt Series Brochures are now printed entirely on Forest Stewardship Council™ certified paper. FSC Certification ensures that the paper used in this catalog contains fiber from well-managed and responsibly harvested forests that meet strict environmental and socioeconomic standards. We're proud to be one of the first hardware manufacturers in the country to make this significant move to help our environment. The FSC logo on our brochure signals not only FSC Certification, but also PDQ'S commitment to improving the environment.

