




## ARCHITECTURAL SUBMITTAL SHEET



**KV SERIES IC**



**KV SERIES**

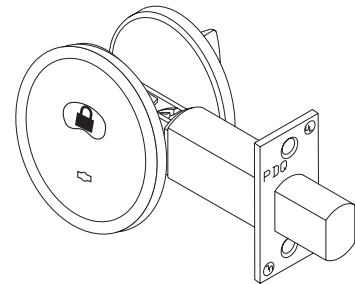

**KV SERIES INDICATOR**

## SPECIFICATIONS



ADA COMPLIANT

<b>FOR DOORS:</b>	• 1-3/8" to 1-3/4" thick for Conventional Cylinder, 1-1/2" to 2" for SFIC
<b>DOOR PREP:</b>	• 2-1/8" DIA
<b>BACKSET:</b>	• 2-3/4"/2-3/8" adjustable (Default)
<b>FRONT:</b>	• 2-1/4" x 1" • Stainless Steel or Wrought Brass
<b>STRIKE:</b>	• 2-3/4" x 1" with filler plate • Stainless Steel or Wrought Brass • Dust Box Included
<b>DEADBOLT:</b>	• 1" Throw • Brass Bolt containing one 1/4" case-hardened Steel Roll Pin
<b>HAND:</b>	• Non-handed
<b>TRIM:</b>	• Stainless Steel or Wrought Brass Scalp
<b>KEYS:</b>	• Two (2) per Lock
<b>KEYWAYS:</b>	• SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
<b>INTERCHANGEABLE CORE:</b>	• 6 or 7-pin • Compatible with Best, Falcon and Arrow
<b>CYLINDER:</b>	• 6-pin Brass Insert Cylinder keyed to 5-pins
<b>KEYING:</b>	• Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) • Can be keyed into existing master key systems
<b>FINISHES:</b>	• 605 (US3) - Bright Brass, 606 (US4) - Satin Brass, 613 (US10B) - Oil Rubbed Bronze, 626 (US26D) - Satin Chrome or 630 (US32D) - Satin Stainless Steel
<b>CERTIFICATIONS, LISTINGS, COMPLIANCES:</b>	• Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Building
<b>WARRANTY:</b>	• One (1) year Limited Warranty